

BGP Best Current Practices

ISP Workshops



These materials are licensed under the Creative Commons Attribution-NonCommercial 4.0 International license (<http://creativecommons.org/licenses/by-nc/4.0/>)

Last updated 21st May 2024

Acknowledgements

- ❑ This material originated from the Cisco ISP/IXP Workshop Programme developed by Philip Smith & Barry Greene
- ❑ Use of these materials is encouraged as long as the source is fully acknowledged and this notice remains in place
- ❑ Bug fixes and improvements are welcomed
 - Please email *workshop (at) bgp4all.com*

Philip Smith

BGP Videos

- ❑ NSRC has made a video recording of this presentation, as part of a library of BGP videos for the whole community to use:
 - https://learn.nsrc.org/bgp#bgp_best_practices

The screenshot displays the NSRC (Network Startup Resource Center) website. The header includes the NSRC logo, navigation links (Home, About, BGP for All, perfSONAR, ScienceDMZ, FedIdM, Contact Us), and a search bar. The main content area is divided into three columns. The left column features a 'BGP for All' section with a description of BGP and a 'Video Topics' list with color-coded buttons for BGP for All, perfSONAR, ScienceDMZ, and FedIdM. The middle column, titled 'Introduction to Routing', lists various topics such as Internet Routing, Routing Protocols, and OSPF. The right column features a large video player for 'BGP for All' with a play button and a 'Watch on YouTube' link, followed by 'BGP Case Studies' and 'Communities' sections.

NSRC Network Startup Resource Center

Home About **BGP for All** perfSONAR ScienceDMZ FedIdM Contact Us Search

BGP for All

Border Gateway Protocol (BGP) is the primary routing protocol used to transfer data and information on the Internet or autonomous systems. BGP is a Path Vector Protocol which maintains paths to different hosts, networks and gateway routers and determines the routing decision based on rules, filtering, weight and community.

Understanding the myriad options for routing can produce efficiencies for institutions and create opportunities for research and education networks to collaborate.

Video Topics

- BGP for All
- perfSONAR
- ScienceDMZ
- FedIdM

Introduction to Routing

- Internet Routing
- Routing Protocols
- Introduction to IS-IS UPDATED
- IS-IS Levels
- IS-IS Adjacencies
- Best Configuration Practices for IS-IS on Cisco IOS
- IS-IS Authentication, Default Routes and IPv6
- Introduction to OSPF
- OSPF Areas
- OSPF Adjacencies
- Best Configuration Practices for OSPF on Cisco IOS
- OSPF Authentication, Default Routes and IPv6
- Comparing OSPF and IS-IS
- Choosing between OSPF and IS-IS
- Migrating from OSPF to IS-IS
- Migration Plan
- Finalizing Migration

Introduction to BGP

- Introduction to Border Gateway Protocol
- Transit and Peering
- Autonomous Systems UPDATED
- How BGP works
- Supporting Multiple Protocols
- IBGP versus EBG
- Setting up EBG
- Setting up IBGP

BGP Case Studies

- Peering Priorities NEW
- Transit Provider Peering at an IXP NEW
- Customer Multihomed between two IXPs NEW
- Traffic Engineering for an ISP connected to two IXes NEW
- Traffic Engineering for an ISP with two interfaces on one IX LAN NEW
- Traffic Engineering and CDNs NEW

Communities

- Communities: RFC 1998 Traffic Engineering
- Communities: Simplifying Traffic Engineering
- How to Apply Communities to Originated Routes
- How to Use Communities for Service Identification

Configuring BGP



Where do we start?

Cisco IOS Good Practices

- ❑ Network Operators should start off with the following BGP commands as a basic template:

```
router bgp 64511  
  bgp deterministic-med  
  no bgp default ipv4-unicast  
  distance bgp 200 200 200  
  no synchronization  
  no auto-summary
```

← Replace with public ASN

← Turn off IOS assumption that all neighbours will exchange IPv4 prefixes

← Make EBGP and IBGP distance the same & more than any IGP

EBGP Default Behaviour

- ❑ Industry standard is described in RFC8212
 - <https://tools.ietf.org/html/rfc8212>
 - External BGP (EBGP) Route Propagation Behaviour without Policies

- ❑ NB: BGP in Cisco IOS is permissive by default
 - This is contrary to industry standard and RFC8212

- ❑ Configuring BGP peering without using filters means:
 - All best paths on the local router are passed to the neighbour
 - All routes announced by the neighbour are received by the local router
 - Can have disastrous consequences (see RFC8212)

EBGP Default Behaviour

- ❑ Best practice is to ensure that each EBGP neighbour has inbound and outbound filter applied:

```
router bgp 64511
  address-family ipv4
    neighbor 100.64.0.1 remote-as 64510
    neighbor 100.64.0.1 prefix-list as64510-in in
    neighbor 100.64.0.1 prefix-list as64510-out out
    neighbor 100.64.0.1 activate
```

EBGP Default Behaviour

- FRR turns on RFC8212 support by default:

- <https://frrouting.org/>

```
frr.pfs.lab(config)# router bgp 64512 view LAB
frr.pfs.lab(config-router)# bgp ?
<snip>
ebgp-requires-policy          Require in and out policy for eBGP peers (RFC8212)
<snip>
```

- No prefixes will be sent or received to external peers in the absence of inbound and outbound policy

What is BGP for??



What is an IGP not for?

BGP versus OSPF/ISIS

□ Internal Routing Protocols (IGPs)

- Examples are IS-IS and OSPF
- Used for carrying **infrastructure** addresses
- NOT used for carrying Internet prefixes or customer prefixes
- Design goal is to **minimise** number of prefixes in IGP to aid **scalability** and **rapid convergence**

BGP versus OSPF/IS-IS

- BGP is used
 - Internally (IBGP)
 - Externally (EBGP)
- IBGP is used to carry:
 - Some/all Internet prefixes across backbone
 - Customer prefixes
- EBGP is used to:
 - Exchange prefixes with other ASes
 - Implement routing policy

BGP versus OSPF/IS-IS

❑ DO NOT:

- Distribute BGP prefixes into an IGP
- Distribute IGP routes into BGP
- Use an IGP to carry customer prefixes

❑ **YOUR NETWORK WILL NOT SCALE**

Aggregation



Aggregation

- ❑ Aggregation means announcing the address block received from the RIR to the other ASes connected to your network
- ❑ Subprefixes of this aggregate may be:
 - Used internally in the provider network
 - Announced to other ASes to aid with multihoming
- ❑ Too many operators are still thinking about class Cs, resulting in a proliferation of /24s in the Internet routing table
 - May 2024: 579462 /24s in IPv4 table of 951420 prefixes
- ❑ **The same is happening for /48s with IPv6**
 - May 2024: 93851 /48s in IPv6 table of 194552 prefixes

Configuring Aggregation – Cisco IOS

- ❑ Service Provider has 100.66.0.0/19 address block
- ❑ To put into BGP as an aggregate:

```
router bgp 64511
  address-family ipv4
    network 100.66.0.0 mask 255.255.224.0
  ip route 100.66.0.0 255.255.224.0 null0
```

- ❑ The static route is a “pull up” route
 - More specific prefixes within this address block ensure connectivity to Service Provider’s customers
 - “Longest match” lookup

Aggregation

- ❑ Address block should be announced to the Internet as an aggregate
- ❑ Subprefixes of address block should **NOT** be announced to Internet unless for traffic engineering
 - See BGP Multihoming presentations
- ❑ Aggregate should be generated internally
 - Not on the network borders!

Announcing Aggregate – Cisco IOS


□ Configuration Example

```
router bgp 64511
  address-family ipv4
    network 100.66.0.0 mask 255.255.224.0
    neighbor 100.67.10.1 remote-as 101
    neighbor 100.67.10.1 prefix-list out-filter out
    neighbor 100.67.10.1 prefix-list default in
    neighbor 100.67.10.1 activate
  !
ip route 100.66.0.0 255.255.224.0 null0
!
ip prefix-list out-filter permit 100.66.0.0/19
ip prefix-list out-filter deny 0.0.0.0/0 le 32
!
ip prefix-list default permit 0.0.0.0/0
```

Announcing an Aggregate


- ❑ Network Operators who don't and won't aggregate are held in poor regard by community
- ❑ Registries publish their minimum allocation size
 - For IPv4:
 - ❑ /24
 - For IPv6:
 - ❑ /48 for assignment, /32 for allocation
- ❑ Until 2010, there was no real reason to see anything longer than a /22 IPv4 prefix on the Internet. But now?
 - IPv4 run-out is having an impact
 - It is expected that eventually the global IPv4 table will be mostly /24s

Aggregation – Example

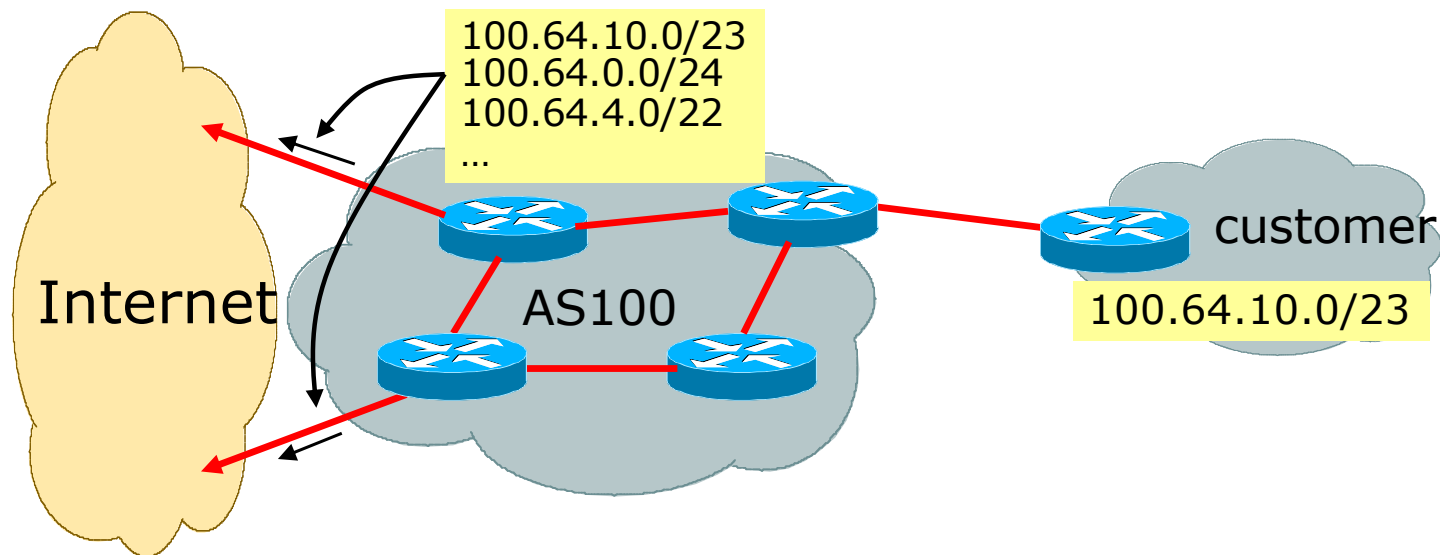


- ❑ Customer has /23 network assigned from AS100's /19 address block
- ❑ AS100 announces customers' individual networks to the Internet

Aggregation – Bad Example


- ❑ Customer link goes down
 - Their /23 network becomes unreachable
 - /23 is withdrawn from AS100's IBGP
 - ❑ Their service provider doesn't aggregate its /19 network block
 - /23 network withdrawal announced to peers
 - Starts rippling through the Internet
 - Added load on all Internet backbone routers as network is removed from routing table
- 
- ❑ Customer link returns
 - Their /23 network is now visible to their provider
 - Their /23 network is re-advertised to peers
 - Starts rippling through Internet
 - Load on Internet backbone routers as network is reinserted into routing table
 - Some service providers suppress the flaps
 - Internet may take 10-20 min or longer to be visible
 - Where is the Quality of Service???

Aggregation – Example

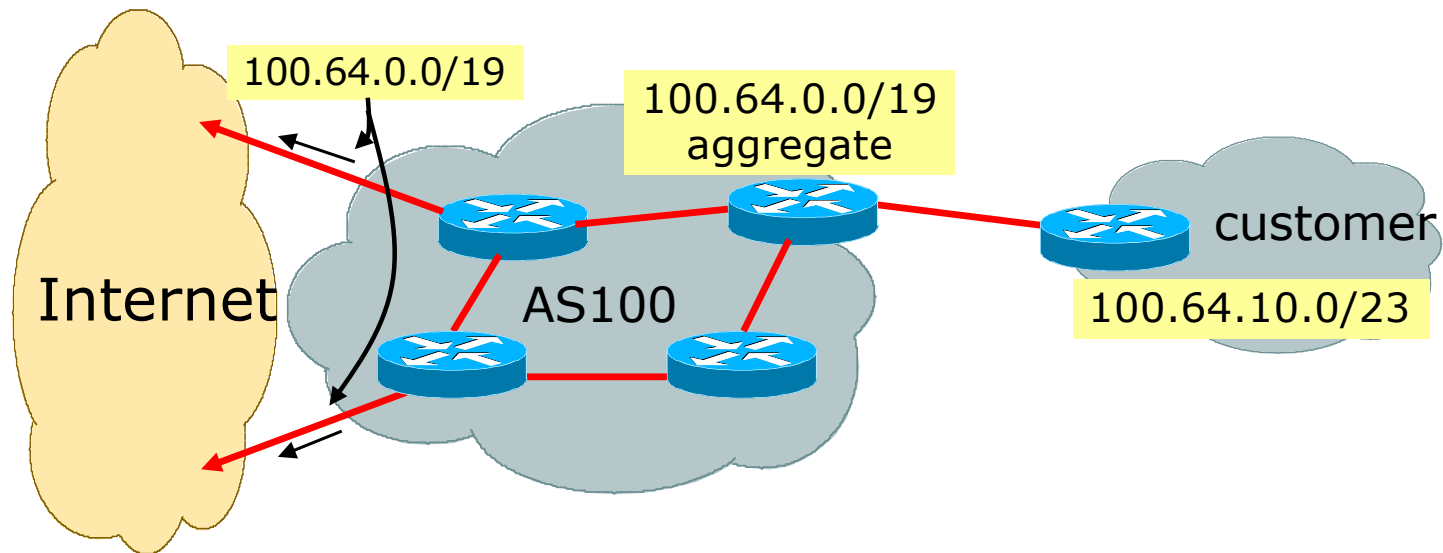

- ❑ Customer has /23 network assigned from AS100's /19 address block
- ❑ AS100 announced /19 aggregate to the Internet

Aggregation – Good Example

- Customer link goes down
 - Their /23 network becomes unreachable
 - /23 is withdrawn from AS100's IBGP
 - /19 aggregate is still being announced
 - No BGP hold down problems
 - No BGP propagation delays
 - No damping by other network operators
- 
- Customer link returns
 - Their /23 network is visible again
 - The /23 is re-injected into AS100's IBGP
 - The whole Internet becomes visible immediately
 - Customer has Quality of Service perception

Aggregation – Summary

- Good example is what everyone should do!
 - Adds to Internet stability
 - Reduces size of routing table
 - Reduces routing churn
 - Improves Internet QoS for **everyone**
- Bad example is what too many still do!
 - Why? Lack of knowledge?
 - Laziness?

Separation of IBGP and EBGP

- ❑ Many network operators do not understand the importance of separating IBGP and EBGP
 - IBGP is where all customer prefixes are carried
 - EBGP is used for announcing aggregate to Internet and for Traffic Engineering
- ❑ Do **NOT** do traffic engineering with customer originated IBGP prefixes
 - Leads to instability similar to that mentioned in the earlier bad example
 - Even though aggregate is announced, a flapping subprefix will lead to instability for the customer concerned
- ❑ **Generate traffic engineering prefixes on the Border Router**

The Internet Today

(May 2024)

■ Current IPv4 Internet Routing Table Statistics

BGP Routing Table Entries	951420
Prefixes after maximum aggregation	361839
Unique prefixes in Internet	462288
/24s announced	579462
ASNs in use	75837

- (maximum aggregation is calculated by Origin AS)
- (unique prefixes > max aggregation means that operators are announcing prefixes from their blocks without a covering aggregate)

The Internet Today

(May 2024)

▣ Current IPv6 Internet Routing Table Statistics

BGP Routing Table Entries	194552
/48s announced	93851
ASNs in use	32692

Efforts to improve aggregation

□ The CIDR Report

- Initiated and operated for many years by Tony Bates
- Now combined with Geoff Huston's routing analysis
 - www.cidr-report.org
 - (covers both IPv4 and IPv6 BGP tables)
- Results e-mailed on a weekly basis to most operations lists around the world
- Lists the top 30 service providers who could do better at aggregating

□ RIPE Routing WG aggregation recommendations

- IPv4: RIPE-399 — www.ripe.net/ripe/docs/ripe-399.html
- IPv6: RIPE-532 — www.ripe.net/ripe/docs/ripe-532.html

Efforts to Improve Aggregation

The CIDR Report


- ❑ Also computes the size of the routing table assuming network operators performed optimal aggregation
- ❑ Website allows searches and computations of aggregation to be made on a per AS basis
 - Flexible and powerful tool to aid network operators
 - Intended to show how greater efficiency in terms of BGP table size can be obtained without loss of routing and policy information
 - Shows what forms of origin AS aggregation could be performed and the potential benefit of such actions to the total table size
 - Very effectively challenges the traffic engineering excuse

Status Summary

Table History

Date	Prefixes	CIDR Aggregated
14-05-24	970139	543467
15-05-24	970332	544537
16-05-24	971335	543485
17-05-24	970180	544425
18-05-24	971587	544162
19-05-24	971543	544487
20-05-24	971640	544862
21-05-24	971792	543339

Plot: [BGP Table Size](#)

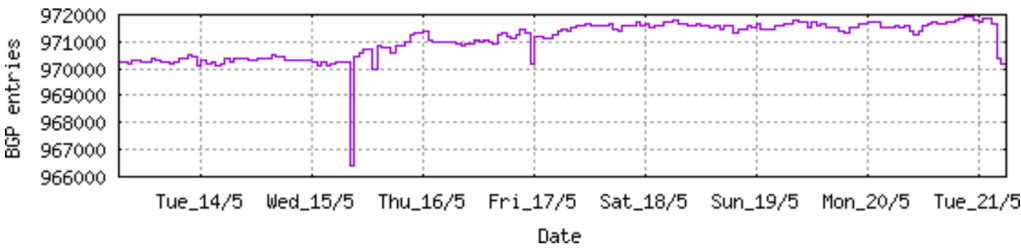

AS Summary

76047	Number of ASes in routing system
26602	Number of ASes announcing only one prefix
12180	Largest number of prefixes announced by an AS AS8151 : UNINET, MX
228453632	Largest address span announced by an AS (/32s) AS749 : DNIC-AS-00749, US


Plot: [AS count](#)

Plot: [Average announcements per origin AS](#)

Report: [ASes ordered by originating address span](#)

Report: [ASes ordered by transit address span](#)

Report: [Autonomous System number-to-name](#) mapping (from Registry WHOIS data)

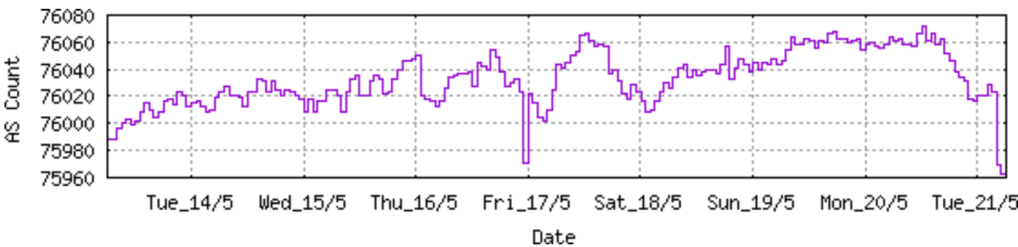

Announced Prefixes

Rank	AS	Type	Originate	Addr Space (pfx)	Transit	Addr space (pfx)	Description
88	AS6389		ORG+TRN Originate:	8144640 /9.04	Transit:	54272 /16.27	BELLSOUTH-NET-BLK, US

Aggregation Suggestions

Filter: [Aggregates](#), [Specifics](#)

Long term deaggregator
– BellSouth in the US

This report does not take into account conditions local to each origin AS in terms of policy or traffic engineering requirements, so this is an approximate guideline as to aggregation possibilities.

Rank	AS	AS Name	Current	Withdw	Aggte	Annce	Redctn	%
91	AS6389	BELLSOUTH-NET-BLK, US	652	547	10	115	537	82.36%

Prefix	AS Path	Aggregation Suggestion
12.81.120.0/24	4608 7575 2914 7018 6389	
12.130.209.0/24	4777 2516 1299 7018 6389 6389 6389 6389	
65.5.0.0/16	4608 7575 2914 7018 6389	
65.5.64.0/22	4608 7575 2914 7018 6389 - Withdrawn - matching aggregate	65.5.0.0/16 4608 7575 2914 7018 6389
65.5.118.0/23	4608 7575 2914 7018 6389 - Withdrawn - matching aggregate	65.5.0.0/16 4608 7575 2914 7018 6389
65.5.160.0/22	4608 7575 2914 7018 6389 - Withdrawn - matching aggregate	65.5.0.0/16 4608 7575 2914 7018 6389
65.5.164.0/22	4608 7575 2914 7018 6389 - Withdrawn - matching aggregate	65.5.0.0/16 4608 7575 2914 7018 6389
65.5.172.0/22	4608 7575 2914 7018 6389 - Withdrawn - matching aggregate	65.5.0.0/16 4608 7575 2914 7018 6389
65.5.200.0/21	4608 7575 2914 7018 6389 - Withdrawn - matching aggregate	65.5.0.0/16 4608 7575 2914 7018 6389
65.5.228.0/22	4608 7575 2914 7018 6389 - Withdrawn - matching aggregate	65.5.0.0/16 4608 7575 2914 7018 6389
65.5.232.0/22	4608 7575 2914 7018 6389 - Withdrawn - matching aggregate	65.5.0.0/16 4608 7575 2914 7018 6389
65.5.236.0/22	4608 7575 2914 7018 6389 - Withdrawn - matching aggregate	65.5.0.0/16 4608 7575 2914 7018 6389
65.5.240.0/22	4608 7575 2914 7018 6389 - Withdrawn - matching aggregate	65.5.0.0/16 4608 7575 2914 7018 6389
65.5.244.0/22	4608 7575 2914 7018 6389 - Withdrawn - matching aggregate	65.5.0.0/16 4608 7575 2914 7018 6389
65.5.248.0/22	4608 7575 2914 7018 6389 - Withdrawn - matching aggregate	65.5.0.0/16 4608 7575 2914 7018 6389
65.5.252.0/22	4608 7575 2914 7018 6389 - Withdrawn - matching aggregate	65.5.0.0/16 4608 7575 2914 7018 6389
65.6.0.0/15	4608 7575 2914 7018 6389	
65.6.192.0/22	4608 7575 2914 7018 6389 - Withdrawn - matching aggregate	65.6.0.0/15 4608 7575 2914 7018 6389
65.6.196.0/22	4608 7575 2914 7018 6389 - Withdrawn - matching aggregate	65.6.0.0/15 4608 7575 2914 7018 6389
65.7.64.0/18	4608 7575 2914 7018 6389	
65.12.0.0/14	4608 7575 2914 7018 6389	
65.12.32.0/20	4608 7575 2914 7018 6389 - Withdrawn - matching aggregate	65.12.0.0/14 4608 7575 2914 7018 6389
65.13.84.0/22	4608 7575 2914 7018 6389 - Withdrawn - matching aggregate	65.12.0.0/14 4608 7575 2914 7018 6389
65.13.92.0/22	4608 7575 2914 7018 6389 - Withdrawn - matching aggregate	65.12.0.0/14 4608 7575 2914 7018 6389
65.13.120.0/22	4608 7575 2914 7018 6389 - Withdrawn - matching aggregate	65.12.0.0/14 4608 7575 2914 7018 6389
65.13.124.0/22	4608 7575 2914 7018 6389 - Withdrawn - matching aggregate	65.12.0.0/14 4608 7575 2914 7018 6389
65.13.136.0/22	4608 7575 2914 7018 6389 - Withdrawn - matching aggregate	65.12.0.0/14 4608 7575 2914 7018 6389
65.13.176.0/21	4608 7575 2914 7018 6389 - Withdrawn - matching aggregate	65.12.0.0/14 4608 7575 2914 7018 6389
65.13.184.0/21	4608 7575 2914 7018 6389 - Withdrawn - matching aggregate	65.12.0.0/14 4608 7575 2914 7018 6389
65.13.192.0/22	4608 7575 2914 7018 6389 - Withdrawn - matching aggregate	65.12.0.0/14 4608 7575 2914 7018 6389
65.13.196.0/22	4608 7575 2914 7018 6389 - Withdrawn - matching aggregate	65.12.0.0/14 4608 7575 2914 7018 6389

Announced Prefixes

Rank	AS	Type	Originate	Addr Space (pfx)	Transit	Addr space (pfx)	Description
121	AS18403		ORG+TRN Originate:	6128384 /9.45	Transit:	393472 /13.41	FPT-AS-AP FPT Telecom Company, VN

Aggregation Suggestions

Filter: [Aggregates](#), [Specifics](#)

Long term deaggregator
– FPT in Vietnam

This report does not take into account conditions local to each origin AS in terms of policy or traffic engineering requirements, so this is an approximate guideline as to aggregation possibilities.

Rank	AS	AS Name	Current	Withdw	Aggte	Annce	Redctn	%
6	AS18403	FPT-AS-AP FPT Telecom Company, VN	4404	4368	1	37	4367	99.16%

Prefix	AS Path	Aggregation Suggestion
1.52.0.0/14	4608 4635 18403 18403	
1.52.0.0/18	4608 4635 18403 18403 - Withdrawn	- matching aggregate 1.52.0.0/14 4608 4635 18403 18403
1.52.0.0/20	4608 4635 18403 18403 - Withdrawn	- matching aggregate 1.52.0.0/14 4608 4635 18403 18403
1.52.0.0/23	4608 4635 18403 18403 - Withdrawn	- matching aggregate 1.52.0.0/14 4608 4635 18403 18403
1.52.2.0/23	4608 4635 18403 18403 - Withdrawn	- matching aggregate 1.52.0.0/14 4608 4635 18403 18403
1.52.4.0/24	4608 4635 18403 18403 - Withdrawn	- matching aggregate 1.52.0.0/14 4608 4635 18403 18403
1.52.5.0/24	4608 4635 18403 18403 - Withdrawn	- matching aggregate 1.52.0.0/14 4608 4635 18403 18403
1.52.6.0/24	4608 4635 18403 18403 - Withdrawn	- matching aggregate 1.52.0.0/14 4608 4635 18403 18403
1.52.7.0/24	4608 4635 18403 18403 - Withdrawn	- matching aggregate 1.52.0.0/14 4608 4635 18403 18403
1.52.8.0/23	4608 4635 18403 18403 - Withdrawn	- matching aggregate 1.52.0.0/14 4608 4635 18403 18403
1.52.10.0/24	4608 4635 18403 18403 - Withdrawn	- matching aggregate 1.52.0.0/14 4608 4635 18403 18403
1.52.11.0/24	4608 4635 18403 18403 - Withdrawn	- matching aggregate 1.52.0.0/14 4608 4635 18403 18403
1.52.12.0/24	4608 4635 18403 18403 - Withdrawn	- matching aggregate 1.52.0.0/14 4608 4635 18403 18403
1.52.13.0/24	4608 4635 18403 18403 - Withdrawn	- matching aggregate 1.52.0.0/14 4608 4635 18403 18403
1.52.14.0/24	4608 4635 18403 18403 - Withdrawn	- matching aggregate 1.52.0.0/14 4608 4635 18403 18403
1.52.15.0/24	4608 4635 18403 18403 - Withdrawn	- matching aggregate 1.52.0.0/14 4608 4635 18403 18403
1.52.16.0/20	4608 4635 18403 18403 - Withdrawn	- matching aggregate 1.52.0.0/14 4608 4635 18403 18403
1.52.16.0/24	4608 4635 18403 18403 - Withdrawn	- matching aggregate 1.52.0.0/14 4608 4635 18403 18403
1.52.17.0/24	4608 4635 18403 18403 - Withdrawn	- matching aggregate 1.52.0.0/14 4608 4635 18403 18403
1.52.18.0/24	4608 4635 18403 18403 - Withdrawn	- matching aggregate 1.52.0.0/14 4608 4635 18403 18403
1.52.19.0/24	4608 4635 18403 18403 - Withdrawn	- matching aggregate 1.52.0.0/14 4608 4635 18403 18403
1.52.20.0/24	4608 4635 18403 18403 - Withdrawn	- matching aggregate 1.52.0.0/14 4608 4635 18403 18403
1.52.21.0/24	4608 4635 18403 18403 - Withdrawn	- matching aggregate 1.52.0.0/14 4608 4635 18403 18403
1.52.22.0/24	4608 4635 18403 18403 - Withdrawn	- matching aggregate 1.52.0.0/14 4608 4635 18403 18403
1.52.23.0/24	4608 4635 18403 18403 - Withdrawn	- matching aggregate 1.52.0.0/14 4608 4635 18403 18403
1.52.24.0/24	4608 4635 18403 18403 - Withdrawn	- matching aggregate 1.52.0.0/14 4608 4635 18403 18403
1.52.25.0/24	4608 4635 18403 18403 - Withdrawn	- matching aggregate 1.52.0.0/14 4608 4635 18403 18403
1.52.26.0/24	4608 4635 18403 18403 - Withdrawn	- matching aggregate 1.52.0.0/14 4608 4635 18403 18403
1.52.27.0/24	4608 4635 18403 18403 - Withdrawn	- matching aggregate 1.52.0.0/14 4608 4635 18403 18403
1.52.28.0/24	4608 4635 18403 18403 - Withdrawn	- matching aggregate 1.52.0.0/14 4608 4635 18403 18403
1.52.29.0/24	4608 4635 18403 18403 - Withdrawn	- matching aggregate 1.52.0.0/14 4608 4635 18403 18403

Announced Prefixes

Rank	AS	Type	Originate	Addr Space (pfx)	Transit	Addr space (pfx)	Description
144	AS7545		ORG+TRN Originate:	5141760 /9.71	Transit:	4467968 /9.91	TPG-INTERNET-AP TPG Telecom Limited, AU

Aggregation Suggestions

Filter: [Aggregates](#), [Specifics](#)

Long term deaggregator
– TPG in Australia

This report does not take into account conditions local to each origin AS in terms of policy or traffic engineering requirements, so this is an approximate guideline as to aggregation possibilities.

Rank	AS	AS Name	Current	Withdw	Aggte	Annce	Redctn	%
9	AS7545	TPG-INTERNET-AP TPG Telecom Limited, AU	5628	4053	501	2076	3552	63.11%

Prefix	AS Path	Aggregation Suggestion
14.2.0.0/17	4608 7575 7545	+ Announce - aggregate of 14.2.0.0/18 (4608 7575 7545) and 14.2.64.0/18 (4608 7575 7545)
14.2.0.0/19	4608 7575 7545	- Withdrawn - aggregated with 14.2.32.0/19 (4608 7575 7545)
14.2.32.0/19	4608 7575 7545	- Withdrawn - aggregated with 14.2.0.0/19 (4608 7575 7545)
14.2.32.0/21	4608 7575 7545	- Withdrawn - matching aggregate 14.2.32.0/19 4608 7575 7545
14.2.40.0/21	4608 7575 7545	- Withdrawn - matching aggregate 14.2.32.0/19 4608 7575 7545
14.2.48.0/21	4608 7575 7545	- Withdrawn - matching aggregate 14.2.32.0/19 4608 7575 7545
14.2.56.0/21	4608 7575 7545	- Withdrawn - matching aggregate 14.2.32.0/19 4608 7575 7545
14.2.64.0/19	4608 7575 7545	- Withdrawn - aggregated with 14.2.96.0/19 (4608 7575 7545)
14.2.96.0/19	4608 7575 7545	- Withdrawn - aggregated with 14.2.64.0/19 (4608 7575 7545)
14.2.128.0/18	4608 4635 7545	
14.2.192.0/20	4608 7575 7545	
14.200.0.0/14	4608 7575 7545	
14.200.1.0/24	4608 4635 7545	
14.200.2.0/24	4608 4635 7545	
14.200.4.0/24	4608 4635 7545	
14.200.5.0/24	4608 7575 7545	- Withdrawn - matching aggregate 14.200.0.0/14 4608 7575 7545
14.200.6.0/24	4608 7575 7545	- Withdrawn - matching aggregate 14.200.0.0/14 4608 7575 7545
14.200.7.0/24	4608 4635 7545	
14.200.8.0/24	4608 7575 7545	- Withdrawn - matching aggregate 14.200.0.0/14 4608 7575 7545
14.200.10.0/24	4608 7575 7545	- Withdrawn - matching aggregate 14.200.0.0/14 4608 7575 7545
14.200.11.0/24	4608 7575 7545	- Withdrawn - matching aggregate 14.200.0.0/14 4608 7575 7545
14.200.12.0/23	4608 4635 7545	+ Announce - aggregate of 14.200.12.0/24 (4608 4635 7545) and 14.200.13.0/24 (4608 4635 7545)
14.200.12.0/24	4608 4635 7545	- Withdrawn - aggregated with 14.200.13.0/24 (4608 4635 7545)
14.200.13.0/24	4608 4635 7545	- Withdrawn - aggregated with 14.200.12.0/24 (4608 4635 7545)
14.200.14.0/24	4608 7575 7545	- Withdrawn - matching aggregate 14.200.0.0/14 4608 7575 7545
14.200.15.0/24	4608 7575 7545	- Withdrawn - matching aggregate 14.200.0.0/14 4608 7575 7545
14.200.16.0/24	4608 4635 7545	
14.200.17.0/24	4608 7575 7545	- Withdrawn - matching aggregate 14.200.0.0/14 4608 7575 7545
14.200.18.0/24	4608 7575 7545	- Withdrawn - matching aggregate 14.200.0.0/14 4608 7575 7545
14.200.19.0/24	4608 4635 7545	
14.200.20.0/22	4608 4635 7545	+ Announce - aggregate of 14.200.20.0/23 (4608 4635 7545) and 14.200.22.0/23 (4608 4635 7545)

Announced Prefixes

Rank	AS	Type	Originate	Addr Space (pfx)	Transit	Addr space (pfx)	Description
51	AS12479		ORG+TRN Originate:	14205696 /8.24	Transit:	400896 /13.39	UNI2-AS, ES

Aggregation Suggestions

Long term deaggregator
– Orange in Spain

Filter: [Aggregates](#), [Specifics](#)

This report does not take into account conditions local to each origin AS in terms of policy or traffic engineering requirements, so this is an approximate guideline as to aggregation possibilities.

Rank	AS	AS Name	Current	Wthdw	Aggte	Annce	Redctn	%
3	AS12479	UNI2-AS, ES	7770	7531	48	287	7483	96.31%

Prefix	AS Path	Aggregation Suggestion
1.178.224.0/19	4608 4826 5511 12479	
1.178.224.0/21	4608 4826 5511 12479	- Withdrawn - matching aggregate 1.178.224.0/19 4608 4826 5511 12479
1.178.232.0/21	4608 4826 5511 12479	- Withdrawn - matching aggregate 1.178.224.0/19 4608 4826 5511 12479
1.178.240.0/21	4608 4826 5511 12479	- Withdrawn - matching aggregate 1.178.224.0/19 4608 4826 5511 12479
1.178.248.0/21	4608 4826 5511 12479	- Withdrawn - matching aggregate 1.178.224.0/19 4608 4826 5511 12479
37.11.0.0/16	4608 4826 5511 12479	
37.11.0.0/22	4608 4826 5511 12479	- Withdrawn - matching aggregate 37.11.0.0/16 4608 4826 5511 12479
37.11.4.0/22	4608 4826 5511 12479	- Withdrawn - matching aggregate 37.11.0.0/16 4608 4826 5511 12479
37.11.8.0/22	4608 4826 5511 12479	- Withdrawn - matching aggregate 37.11.0.0/16 4608 4826 5511 12479
37.11.12.0/22	4608 4826 5511 12479	- Withdrawn - matching aggregate 37.11.0.0/16 4608 4826 5511 12479
37.11.16.0/22	4608 4826 5511 12479	- Withdrawn - matching aggregate 37.11.0.0/16 4608 4826 5511 12479
37.11.20.0/22	4608 4826 5511 12479	- Withdrawn - matching aggregate 37.11.0.0/16 4608 4826 5511 12479
37.11.24.0/22	4608 4826 5511 12479	- Withdrawn - matching aggregate 37.11.0.0/16 4608 4826 5511 12479
37.11.28.0/22	4608 4826 5511 12479	- Withdrawn - matching aggregate 37.11.0.0/16 4608 4826 5511 12479
37.11.32.0/22	4608 4826 5511 12479	- Withdrawn - matching aggregate 37.11.0.0/16 4608 4826 5511 12479
37.11.36.0/22	4608 4826 5511 12479	- Withdrawn - matching aggregate 37.11.0.0/16 4608 4826 5511 12479
37.11.40.0/22	4608 4826 5511 12479	- Withdrawn - matching aggregate 37.11.0.0/16 4608 4826 5511 12479
37.11.44.0/22	4608 4826 5511 12479	- Withdrawn - matching aggregate 37.11.0.0/16 4608 4826 5511 12479
37.11.48.0/22	4608 4826 5511 12479	- Withdrawn - matching aggregate 37.11.0.0/16 4608 4826 5511 12479
37.11.52.0/22	4608 4826 5511 12479	- Withdrawn - matching aggregate 37.11.0.0/16 4608 4826 5511 12479
37.11.56.0/23	4608 4826 5511 12479	- Withdrawn - matching aggregate 37.11.0.0/16 4608 4826 5511 12479
37.11.58.0/23	4608 4826 5511 12479	- Withdrawn - matching aggregate 37.11.0.0/16 4608 4826 5511 12479
37.11.60.0/22	4608 4826 5511 12479	- Withdrawn - matching aggregate 37.11.0.0/16 4608 4826 5511 12479
37.11.64.0/22	4608 4826 5511 12479	- Withdrawn - matching aggregate 37.11.0.0/16 4608 4826 5511 12479
37.11.68.0/22	4608 4826 5511 12479	- Withdrawn - matching aggregate 37.11.0.0/16 4608 4826 5511 12479
37.11.72.0/22	4608 4826 5511 12479	- Withdrawn - matching aggregate 37.11.0.0/16 4608 4826 5511 12479
37.11.76.0/22	4608 4826 5511 12479	- Withdrawn - matching aggregate 37.11.0.0/16 4608 4826 5511 12479
37.11.80.0/22	4608 4826 5511 12479	- Withdrawn - matching aggregate 37.11.0.0/16 4608 4826 5511 12479
37.11.88.0/22	4608 4826 5511 12479	- Withdrawn - matching aggregate 37.11.0.0/16 4608 4826 5511 12479
37.11.92.0/22	4608 4826 5511 12479	- Withdrawn - matching aggregate 37.11.0.0/16 4608 4826 5511 12479
37.11.96.0/22	4608 4826 5511 12479	- Withdrawn - matching aggregate 37.11.0.0/16 4608 4826 5511 12479

Importance of Aggregation

□ Size of routing table

- Router Memory is not so much of a problem as it was in the 1990s
- Routers routinely carry over 2 million prefixes

□ Convergence of the Routing System

- This is a problem
- Bigger table takes longer for CPU to process
- BGP updates take longer to deal with
- BGP Instability Report tracks routing system update activity
- bgpupdates.potaroo.net/instability/bgpupd.html

The BGP Instability Report

The BGP Instability Report is updated daily. This report was generated on 21 May 2024 06:23 (UTC+1000)

50 Most active ASes for the past 14 days

RANK	ASN	UPDs	%	Prefixes	UPDs/Prefix	AS NAME
1	39891	548646	4.75%	4758	115.31	ALJAWWALSTC-AS, SA
2	16509	286199	2.48%	10059	28.45	AMAZON-02, US
3	7552	200195	1.73%	3939	50.82	VIETEL-AS-AP Viettel Group, VN
4	8151	133575	1.16%	12379	10.79	UNINET, MX
5	9155	131842	1.14%	432	305.19	QNET Kuwait, KW
6	9829	116709	1.01%	1978	59.00	BSNL-NIB National Internet Backbone, IN
7	36903	104029	0.90%	1249	83.29	MT-MPLS, MA
8	45899	94196	0.82%	3884	24.25	VNPT-AS-VN VNPT Corp, VN
9	44244	90310	0.78%	380	237.66	IRANCELL-AS, IR
10	6057	81896	0.71%	578	141.69	Administracion Nacional de Telecomunicaciones, UY
11	17794	75069	0.65%	13	5774.54	HTCL-ORANGE-HK-AP Hutchison Telephone Company Limited, HK
12	51375	68194	0.59%	334	204.17	VIVA, BH
13	264496	68084	0.59%	26	2618.62	IR Tecnologia Fibralink, BR
14	25019	65811	0.57%	852	77.24	SAUDINETSTC-AS, SA
15	367	63565	0.55%	2997	21.21	DNIC-ASBLK-00306-00371, US
16	20940	62398	0.54%	3904	15.98	AKAMAI-ASN1, NL
17	4538	61806	0.54%	5008	12.34	ERX-CERNET-BKB China Education and Research Network Center, CN
18	9583	56069	0.49%	1840	30.47	SIFY-AS-IN Sify Limited, IN
19	7713	52150	0.45%	3614	14.43	TELKOMNET-AS-AP PT Telekomunikasi Indonesia, ID
20	149038	50512	0.44%	2	25256.00	UCGCL-AS-AP UNIQUE COMM GROUP COMPANY LIMITED, MM
21	58224	49757	0.43%	1442	34.51	TCI, IR
22	4155	45312	0.39%	1832	24.73	USDA-1, US
23	647	44513	0.39%	406	109.64	DNIC-ASBLK-00616-00665, US
24	36914	44476	0.39%	549	81.01	KENET-AS, KE
25	37342	41612	0.36%	512	81.27	MOVITEL, MZ
26	47589	41043	0.36%	200	205.22	KTC3G, KW
27	26615	39607	0.34%	1075	36.84	TIM SA, BR

50 Most active Prefixes for the past 14 days

RANK	PREFIX	UPDs	%	Origin AS -- AS NAME
1	66.133.36.0/24	35342	0.30%	12684 -- SES-LUX-AS, LU
2	143.255.204.0/22	33898	0.29%	264496 -- IR Tecnologia Fibralink, BR
3	177.55.65.0/24	33870	0.29%	264496 -- IR Tecnologia Fibralink, BR
4	89.223.20.0/24	30453	0.26%	210656 -- YACLOUDBMS, RU
5	45.172.92.0/22	29833	0.25%	265566 -- TELESISTEMAS PENINSULARES SA DE CV, MX
6	103.248.132.0/22	26557	0.22%	132829 -- NCPL-AS-AP Navigate Communications S Pte Ltd, SG
7	204.157.105.0/24	26033	0.22%	268817 -- Acelara Telecom, BR
8	103.177.87.0/24	25259	0.21%	149038 -- UCGCL-AS-AP UNIQUE COMM GROUP COMPANY LIMITED, MM
9	103.177.86.0/24	25253	0.21%	149038 -- UCGCL-AS-AP UNIQUE COMM GROUP COMPANY LIMITED, MM
10	203.145.78.0/24	25024	0.21%	17794 -- HTCL-ORANGE-HK-AP Hutchison Telephone Company Limited, HK
11	202.45.88.0/24	25023	0.21%	17794 -- HTCL-ORANGE-HK-AP Hutchison Telephone Company Limited, HK
12	203.145.74.0/24	25022	0.21%	17794 -- HTCL-ORANGE-HK-AP Hutchison Telephone Company Limited, HK
13	163.121.10.0/24	23532	0.20%	25576 -- AFMIC, EG
14	23.52.69.0/24	19028	0.16%	20940 -- AKAMAI-ASN1, NL
15	170.238.225.0/24	18750	0.16%	266407 -- ASSEMBLEIA LEGISLATIVA DO ESTADO DE GOIAS, BR
16	143.255.59.0/24	17938	0.15%	33182 -- DIMENOC, US
17	23.187.80.0/24	17091	0.14%	399897 -- FULLSPANSOLUTIONS-AS01, US
18	23.210.214.0/24	17083	0.14%	20940 -- AKAMAI-ASN1, NL
19	208.65.145.0/24	16475	0.14%	203724 -- MGG4-AS1, DE
20	67.211.53.0/24	16055	0.14%	26405 -- HDCS, US
21	177.137.17.0/24	15736	0.13%	53225 -- IPGLOBE INTERNET LTDA, BR
22	103.223.2.0/24	15654	0.13%	135445 -- IDNIC-AIRPAY-AS-ID PT. Airpay International Indonesia, ID
23	191.37.222.0/24	14407	0.12%	263373 -- -Reserved AS-, ZZ 273309 -- UNI TELECOM LTDA, BR
24	107.154.97.0/24	13745	0.12%	19551 -- INCAPSULA, US
25	207.167.116.0/22	13587	0.11%	7954 -- IMMENSE-NETWORKS, US
26	185.32.70.0/24	13534	0.11%	51269 -- HEXATOM, FR
27	130.137.230.0/24	13136	0.11%	16509 -- AMAZON-02, US
28	137.227.74.0/24	12931	0.11%	22284 -- AS22284-DOI-OPS, US
29	103.209.92.0/24	12876	0.11%	150180 -- AFRENIT-AS-AP AFREN IT, BD
30	103.209.93.0/24	12874	0.11%	150180 -- AFRENIT-AS-AP AFREN IT, BD
31	208.65.144.0/24	11833	0.10%	203724 -- MGG4-AS1, DE

The BGP IPv6 Instability Report

This report is updated daily. The current report was generated on 21 May 2024 01:11 (UTC+1000)

50 Most active ASes for the past 14 days

RANK	ASN	UPDs	%	Prefixes	UPDs/Prefix	AS NAME
1	39891	338384	9.49%	1641	206.21	ALJAWWALSTC-AS, SA
2	20473	294316	8.25%	1733	169.83	AS-CHOOPA, US
3	40138	185774	5.21%	41	4531.07	MDNET, US
4	16509	183042	5.13%	4840	37.82	AMAZON-02, US
5	202256	138796	3.89%	576	240.97	LAWLIETNET, CN
6	7545	86456	2.42%	2179	39.68	TPG-INTERNET-AP TPG Telecom Limited, AU
7	53667	82879	2.32%	1104	75.07	PONYNET, US
8	11172	70171	1.97%	6887	10.19	Alestra, S. de R.L. de C.V., MX
9	199436	61336	1.72%	15	4089.07	A-NET Shota Network Shota Saikou!, CN
10	25019	61173	1.72%	179	341.75	SAUDINETSTC-AS, SA
11	13335	58538	1.64%	1645	35.59	CLOUDFLARENET, US
12	21664	43098	1.21%	31	1390.26	AMZN-BYOASN, US
13	210842	40642	1.14%	196	207.36	RKZED-AS, ID
14	10620	39451	1.11%	152	259.55	Telmex Colombia S.A., CO
15	272004	39287	1.10%	3	13095.67	EGP COMUNICACIONES S.A.C, PE
16	199073	36495	1.02%	7	5213.57	IMPLETECH-AS, HK
17	14080	34783	0.98%	192	181.16	Telmex Colombia S.A., CO
18	24406	33920	0.95%	16	2120.00	CNNIC-CRITICAL-AP China Internet Network Infomation Center, CN
19	263390	31300	0.88%	23	1360.87	FNT Telecomunicacoes e Acesso a Redes de Internet, BR
20	133612	27404	0.77%	485	56.50	VODAFONE-AS-AP Vodafone Australia Pty Ltd, AU
21	266207	27082	0.76%	11	2462.00	Onitel Telecomunicacoes, BR
22	216435	25769	0.72%	258	99.88	PLIMMOBILE-AS 7HOOP NETWORK TELECOM ::::::::::::::::::::::::::::::::::::::, US
23	267641	24576	0.69%	2	12288.00	DK Telecom, BR
24	19180	24091	0.68%	1	24091.00	AMERICATEL PERU S.A., PE
25	45271	23973	0.67%	1823	13.15	ICLNET-AS-AP Idea Cellular Limited, IN
26	9829	23675	0.66%	552	42.89	BSNL-NIB National Internet Backbone, IN
27	141145	22594	0.63%	1	22594.00	GIGANET-AS-ID PT Giga Digital Nusantara, ID
28	20940	22322	0.63%	786	28.40	AKAMAI-ASN1, NL

50 Most active Prefixes for the past 14 days

RANK	PREFIX	UPDs	%	Origin AS -- AS NAME
1	2804:4498:8000::/36	24562	0.63%	267641 -- DK Telecom, BR
2	2001:1380:2000::/36	24091	0.62%	19180 -- AMERICATEL PERU S.A., PE
3	2a09:bac0:485::/48	23734	0.61%	13335 -- CLOUDFLARENET, US
4	2407:5440::/48	22594	0.58%	141145 -- GIGANET-AS-ID PT Giga Digital Nusantara, ID
5	2400:cb00:485::/48	21758	0.56%	13335 -- CLOUDFLARENET, US
6	2a10:ccc0:cccc::/46	17675	0.46%	151194 -- STELIGHT-AS-AP Zhu Yucheng, CN
7	2a0c:b641:302::/47	17214	0.44%	204210 -- ZEUSPACKAGINGLTD, IE
8	2a13:b487:1b88::/47	16071	0.41%	199436 -- A-NET Shota Network Shota Saikou!, CN
9	2a13:b487:1bb6::/47	16061	0.41%	199436 -- A-NET Shota Network Shota Saikou!, CN
10	2803:f080:c020::/43	15607	0.40%	272004 -- EGP COMUNICACIONES S.A.C, PE
11	2803:f080:c000::/35	15043	0.39%	272004 -- EGP COMUNICACIONES S.A.C, PE 64120 -- NOCPERU-LATIN TECHNOLOGIES, PE
12	2a13:b487:1bba::/47	15013	0.39%	199436 -- A-NET Shota Network Shota Saikou!, CN
13	2803:6910::/32	14833	0.38%	272004 -- EGP COMUNICACIONES S.A.C, PE
14	2a05:dfc1:1b05::/48	14618	0.38%	199073 -- IMPLETECH-AS, HK
15	2a05:dfc1:1b10::/48	14612	0.38%	199073 -- IMPLETECH-AS, HK
16	2a13:b487:1bb8::/47	13914	0.36%	199436 -- A-NET Shota Network Shota Saikou!, CN
17	2a01:bfe0::/32	13650	0.35%	199997 -- IPPON_HOSTING-AS, FR
18	2400:58a0:1800::/44	13388	0.34%	150404 -- THUNDER-AS-AP Thunder Network Limited, HK
19	2a0f:7803:fb40::/48	13026	0.34%	215304 -- YUWAN, GB
20	2a0f:5707:fff5::/48	12569	0.32%	207401 -- SMTc, CN
21	2a0f:7803:ffd1::/48	11978	0.31%	198266 -- YNN5-NET, CN
22	2a0a:afc7::/48	11910	0.31%	201196 -- BERMOND-AS, VG
23	2600:1413:4000::/48	10849	0.28%	20940 -- AKAMAI-ASN1, NL
24	2001:67c:21f0::/48	10557	0.27%	52191 -- LOCALKA-NET-AS, UA
25	2602:fed2:770a::/48	10040	0.26%	25846 -- US-CLOUDNIUM-01, US
26	2a0c:1040::/29	9533	0.25%	204382 -- ANNATEL-, FR
27	2600:40fc:1004::/48	9089	0.23%	14210 -- EDGECAST, US
28	2605:9cc0:c1a::/48	8730	0.22%	16509 -- AMAZON-02, US 21664 -- AMZN-BYOASN, US
29	2605:9cc0:c0b::/48	8339	0.21%	16509 -- AMAZON-02, US 21664 -- AMZN-BYOASN, US
30	2402:e580:74b8::/48	8056	0.21%	40138 -- MDNET, US

Aggregation: Summary

- Aggregation on the Internet could be **MUCH** better
 - 50% saving on Internet routing table size is quite feasible
 - Tools **are** available
 - Commands on the routers are not hard
 - CIDR-Report webpage

Receiving Prefixes



Receiving Prefixes

- ❑ There are three scenarios for receiving prefixes from other ASes
 - Customer talking BGP
 - Peer talking BGP
 - Upstream/Transit talking BGP
- ❑ Each has different filtering requirements and need to be considered separately

Receiving Prefixes: From Customers

- ❑ Network Operators must only accept prefixes which have been assigned or allocated to their downstream customer
- ❑ If the Network Operator has assigned address space to its customer, then the customer IS entitled to announce it back to their provider
- ❑ If the Network Operator has NOT assigned address space to its customer, then:
 - Check in the five RIR databases to see if this address space really has been assigned to the customer
 - The tool: **whois -h jwhois.apnic.net x.x.x.0/24**
 - ❑ (jwhois is "joint whois" and queries the 5 RIR databases)

Receiving Prefixes: From Customers

- Example use of whois to check if customer is entitled to announce address space:

```
$ whois -h jwhois.apnic.net 202.12.29.0
```

inetnum – means it is an address delegation to an entity

```
inetnum: 202.12.29.0 - 202.12.29.255
netname: APNIC-SERVICES-AU
descr: Asia Pacific Network Information Centre
descr: Regional Internet Registry for the Asia-Pacific Region
descr: 6 Cordelia Street
descr: South Brisbane
country: AU
geofeed: https://geofeed.apnic.net/geofeed.csv
org: ORG-APNI1-AP
admin-c: AIC1-AP
tech-c: AIC1-AP
abuse-c: AA1589-AP
status: ASSIGNED PORTABLE
mnt-by: APNIC-HM
mnt-routes: MAINT-APNIC-IS-AP
mnt-irt: IRT-APNIC-IS-AP
last-modified: 2024-03-01T05:17:46Z
source: APNIC
```

Portable – means it is an assignment to the customer, the customer can announce it to you

Receiving Prefixes: From Customers

- Example use of whois to check if customer is entitled to announce address space:

```
$ whois -h jwhois.apnic.net 194.15.141.0

inetnum:      194.15.141.0 - 194.15.141.255
netname:      INETTECH
country:      SE
org:          ORG-ITAS2-RIPE
admin-c:      KEL5-RIPE
tech-c:       KEL5-RIPE
status:       ASSIGNED PI
mnt-by:       RIPE-NCC-END-MNT
mnt-by:       KURTIS-PP-MNT
mnt-routes:   KURTIS-PP-MNT
mnt-domains:  KURTIS-PP-MNT
created:      2003-12-04T09:33:09Z
last-modified: 2016-04-14T08:21:55Z
source:       RIPE
sponsoring-org: ORG-NIE1-RIPE
```

inetnum – means it is an address delegation to an entity

Assigned PI – means its an assignment to the customer, the customer can announce it to you

Receiving Prefixes: From Customers

- Example use of whois to check if customer is entitled to announce address space:

```
$ whois -h jwhois.apnic.net 193.128.0.0/22
```

inetnum – means it is an address delegation to an entity

```
inetnum:      193.128.0.0 - 193.128.6.255
netname:      UK-PIPEX-19931014
country:      GB
org:          ORG-UA24-RIPE
admin-c:      WERT1-RIPE
tech-c:       UPHM1-RIPE
status:       ALLOCATED PA
remarks:      Please send abuse notification to abuse@uk.uu.net
mnt-by:       RIPE-NCC-HM-MNT
mnt-by:       AS1849-MNT
mnt-routes:   AS1849-MNT
mnt-routes:   WCOM-EMEA-RICE-MNT
mnt-irt:       IRT-MCI-GB
created:      2018-07-30T09:42:04Z
last-modified: 2018-07-30T09:42:04Z
source:       RIPE # Filtered
```

ALLOCATED – means that this is Provider Aggregatable address space and can only be announced by the service provider holding the allocation (in this case Verizon UK)

Receiving Prefixes from customer: Cisco IOS

- ❑ For Example:
 - Downstream has 100.69.0.0/20 block
 - Should only announce this to upstreams
 - Upstreams should only accept this from them
- ❑ Configuration on upstream

```
router bgp 100
  address-family ipv4
    neighbor 100.67.10.1 remote-as 101
    neighbor 100.67.10.1 prefix-list customer in
    neighbor 100.67.10.1 prefix-list default out
    neighbor 100.67.10.1 activate
  !
ip prefix-list customer permit 100.69.0.0/20
!
ip prefix-list default permit 0.0.0.0/0
```

Receiving Prefixes: From Peers

- A peer is a Network Operator with whom you agree to exchange prefixes you originate into the Internet routing table
 - Prefixes you accept from a peer are only those they have indicated they will announce
 - Prefixes you announce to your peer are only those you have indicated you will announce

Receiving Prefixes: From Peers

- ▣ Agreeing what each will announce to the other:
 - Exchange of e-mail documentation as part of the peering agreement, and then ongoing updates
- OR
- Use of the Internet Routing Registry and configuration tools such as:
 - ▣ IRRToolSet:
<https://github.com/irrtoolset/irrtoolset>
 - ▣ bgpq4:
<https://github.com/bgp/bgpq4>

Receiving Prefixes from peer: Cisco IOS

- ❑ For Example:
 - Peer has 220.50.0.0/16, 61.237.64.0/18 and 81.250.128.0/17 address blocks
- ❑ Configuration on local router

```
router bgp 100
  address-family ipv4
    neighbor 100.67.10.1 remote-as 101
    neighbor 100.67.10.1 prefix-list my-peer in
    neighbor 100.67.10.1 prefix-list my-prefix out
    neighbor 100.67.10.1 activate
  !
ip prefix-list my-peer permit 220.50.0.0/16
ip prefix-list my-peer permit 61.237.64.0/18
ip prefix-list my-peer permit 81.250.128.0/17
ip prefix-list my-peer deny 0.0.0.0/0 le 32
!
ip prefix-list my-prefix permit 100.67.16.0/20
```

Receiving Prefixes: From Upstream/Transit Provider

- ❑ Upstream/Transit Provider is a Network Operator who you pay to give you transit to the **WHOLE** Internet
- ❑ Receiving prefixes from them is not desirable unless really necessary
 - Traffic Engineering – see BGP Multihoming presentations
- ❑ Ask upstream/transit provider to either:
 - originate a default-route
 - OR
 - announce one prefix you can use as default

Receiving Prefixes: From Upstream/Transit Provider

▣ Downstream Router Configuration

```
router bgp 100
  address-family ipv4
    network 100.66.0.0 mask 255.255.224.0
    neighbor 100.65.7.1 remote-as 101
    neighbor 100.65.7.1 prefix-list infilter in
    neighbor 100.65.7.1 prefix-list outfilter out
    neighbor 100.65.7.1 activate
!
ip prefix-list infilter permit 0.0.0.0/0
!
ip prefix-list outfilter permit 100.66.0.0/19
```

Receiving Prefixes: From Upstream/Transit Provider

▣ Upstream Router Configuration

```
router bgp 101
  address-family ipv4
    neighbor 100.65.7.2 remote-as 100
    neighbor 100.65.7.2 default-originate
    neighbor 100.65.7.2 prefix-list cust-in in
    neighbor 100.65.7.2 prefix-list cust-out out
    neighbor 100.65.7.2 activate
!
ip prefix-list cust-in permit 100.66.0.0/19
!
ip prefix-list cust-out permit 0.0.0.0/0
```

Receiving Prefixes: From Upstream/Transit Provider

- ❑ If it is necessary to receive prefixes from any provider, care is required.
 - Don't accept default (unless you need it)
 - Don't accept your own prefixes
- ❑ Special use prefixes for IPv4 and IPv6:
 - <http://www.rfc-editor.org/rfc/rfc6890.txt>
- ❑ For IPv4:
 - Don't accept prefixes longer than /24 (?)
 - ▣ /24 was the historical class C
- ❑ For IPv6:
 - Don't accept prefixes longer than /48 (?)
 - ▣ /48 is the design minimum delegated to a site

Receiving Prefixes: From Upstream/Transit Provider

- ❑ Check Team Cymru's list of "bogons"
 - <https://www.team-cymru.com/bogon-reference-http>
- ❑ For IPv4 also consult:
 - <https://www.rfc-editor.org/rfc/rfc6441.txt> (BCP171)
- ❑ Bogon Route Server:
 - <https://www.team-cymru.com/bogon-reference-bgp>
 - Supplies a BGP feed (IPv4 and/or IPv6) of address blocks which should not appear in the BGP table

Receiving IPv4 Prefixes

```
router bgp 100
  network 101.10.0.0 mask 255.255.224.0
  neighbor 100.65.7.1 remote-as 101
  neighbor 100.65.7.1 prefix-list in-filter in
  !
ip prefix-list in-filter deny 0.0.0.0/0          ! Default
ip prefix-list in-filter deny 0.0.0.0/8 le 32     ! RFC1122 local host
ip prefix-list in-filter deny 10.0.0.0/8 le 32    ! RFC1918
ip prefix-list in-filter deny 100.64.0.0/10 le 32  ! RFC6598 shared address
ip prefix-list in-filter deny 101.10.0.0/19 le 32 ! Local prefix
ip prefix-list in-filter deny 127.0.0.0/8 le 32   ! Loopback
ip prefix-list in-filter deny 169.254.0.0/16 le 32 ! Auto-config
ip prefix-list in-filter deny 172.16.0.0/12 le 32  ! RFC1918
ip prefix-list in-filter deny 192.0.0.0/24 le 32   ! RFC6598 IETF protocol
ip prefix-list in-filter deny 192.0.2.0/24 le 32   ! TEST1
ip prefix-list in-filter deny 192.168.0.0/16 le 32  ! RFC1918
ip prefix-list in-filter deny 198.18.0.0/15 le 32   ! Benchmarking
ip prefix-list in-filter deny 198.51.100.0/24 le 32 ! TEST2
ip prefix-list in-filter deny 203.0.113.0/24 le 32  ! TEST3
ip prefix-list in-filter deny 224.0.0.0/3 le 32     ! Multicast & Experimental
ip prefix-list in-filter deny 0.0.0.0/0 ge 25      ! Prefixes >/24
ip prefix-list in-filter permit 0.0.0.0/0 le 32
```

Receiving IPv6 Prefixes

```
router bgp 100
  network 2020:3030::/32
  neighbor 2020:3030::1 remote-as 101
  neighbor 2020:3030::1 prefix-list v6in-filter in
  !
  ipv6 prefix-list v6in-filter permit 64:ff9b::/96          ! RFC6052 v4v6trans
  ipv6 prefix-list v6in-filter deny 2001::/23 le 128        ! RFC2928 IETF prot
  ipv6 prefix-list v6in-filter deny 2001:2::/48 le 128      ! Benchmarking
  ipv6 prefix-list v6in-filter deny 2001:10::/28 le 128     ! ORCHID
  ipv6 prefix-list v6in-filter deny 2001:db8::/32 le 128    ! Documentation
  ipv6 prefix-list v6in-filter deny 2002::/16 le 128        ! Deny all 6to4
  ipv6 prefix-list v6in-filter deny 2020:3030::/32 le 128   ! Local Prefix
  ipv6 prefix-list v6in-filter deny 3ffe::/16 le 128        ! Formerly 6bone
  ipv6 prefix-list v6in-filter permit 2000::/3 le 48        ! Global Unicast
  ipv6 prefix-list v6in-filter deny ::/0 le 128
```

Note: These filters block Teredo (serious security risk) and 6to4 (deprecated by RFC7526)

Receiving Prefixes

- Paying attention to prefixes received from customers, peers and transit providers assists with:
 - The integrity of the local network
 - The integrity of the Internet
- Responsibility of all Network Operators to be good Internet citizens

Receiving BGP attributes



Receiving BGP attributes

- ❑ BGP attributes are sent as part of the BGP updates for each prefix
- ❑ Common attributes operators need to be aware of, for routing best practice, are:
 - MED
 - AS numbers (only public ASNs are routable)
 - BGP Communities

Receiving Prefixes: MEDs?

- MEDs are used by EBGP neighbours to indicate preferred entry point into their network over two or more links with their neighbour
 - Allows the operator to determine entry path into their network
 - Might have unintended consequences within their peer's network
 - Many operators will override MEDs attached to BGP announcements by setting their own local-preference values

Receiving Prefixes: Bogon ASNs?

- ❑ What about prefixes originated by bogon AS numbers?
 - Public ranges are 1-64495 (excluding 23456) and 131072-458751
 - ❑ IANA is distributing AS blocks to the RIRs from the latter range
 - All other ASNs are either for documentation, or for private use, or are unassigned
 - ❑ And any prefixes originating from those need to be dropped
 - ❑ Configuration error? Malicious intent?
- ❑ What would the AS_PATH filter look like?
 - Challenging with regular expression (as per IOS)
 - Easier with AS ranges (as per Bird or JunOS)

Filtering bogon ASNs – BIRD

- Here is a function showing how to filter bogon ASNs, as described previously:

```
function as_path_contains_bogons()
int set invalid_asns;
{
    invalid_asns = [
        0,                # Reserved
        23456,            # Transition AS
        64496..64511,     # Documentation ASNs
        64512..65534,     # Private ASNs
        65535,            # Reserved
        65536..65551,     # Documentation ASNs
        65552..131071,    # Reserved
        458752..4199999999, # IANA Reserved
        4200000000..4294967294, # Private ASNs
        4294967295        # Reserved
    ];
    return bgp_path ~ invalid_asns;
}
```

Filtering bogon ASNs – FRR

- Here is an AS-PATH regexp showing how to filter bogon ASNs:

```
bgp as-path access-list Bogon_ASNs deny _0_  
bgp as-path access-list Bogon_ASNs deny _23456_  
bgp as-path access-list Bogon_ASNs deny _6449[6-9]_  
bgp as-path access-list Bogon_ASNs deny _64[5-9][0-9][0-9]_  
bgp as-path access-list Bogon_ASNs deny _6[5-9][0-9][0-9][0-9]_  
bgp as-path access-list Bogon_ASNs deny _[7-9][0-9][0-9][0-9][0-9]_  
bgp as-path access-list Bogon_ASNs deny _1[0-2][0-9][0-9][0-9][0-9]_  
bgp as-path access-list Bogon_ASNs deny _130[0-9][0-9][0-9]_  
bgp as-path access-list Bogon_ASNs deny _1310[0-6][0-9]_  
bgp as-path access-list Bogon_ASNs deny _13107[0-1]_  
bgp as-path access-list Bogon_ASNs deny _45875[2-9]_  
bgp as-path access-list Bogon_ASNs deny _4587[6-9][0-9]_  
bgp as-path access-list Bogon_ASNs deny _458[8-9][0-9][0-9]_  
bgp as-path access-list Bogon_ASNs deny _459[0-9][0-9][0-9]_  
bgp as-path access-list Bogon_ASNs deny _4[6-9][0-9][0-9][0-9][0-9]_  
bgp as-path access-list Bogon_ASNs deny _[5-9][0-9][0-9][0-9][0-9][0-9]_  
bgp as-path access-list Bogon_ASNs deny _[0-9][0-9][0-9][0-9][0-9][0-9][0-9]_  
bgp as-path access-list Bogon_ASNs deny _[0-9][0-9][0-9][0-9][0-9][0-9][0-9][0-9]_  
bgp as-path access-list Bogon_ASNs deny _[0-9][0-9][0-9][0-9][0-9][0-9][0-9][0-9][0-9]_  
bgp as-path access-list Bogon_ASNs deny _[0-9][0-9][0-9][0-9][0-9][0-9][0-9][0-9][0-9][0-9]_  
bgp as-path access-list Bogon_ASNs permit .*
```

Receiving Prefixes: BGP Communities?

- BGP communities are attached to BGP announcements to indicate:
 - Internal policy within an AS
 - External policy supported by a peer, for:
 - Onward routing policy/traffic engineering
 - Filtering (eg Remotely Triggered Blackhole Filtering)
 - Traffic engineering between the two networks
- Different BGP implementations have different default BGP community behaviours – consult:
 - Vendor documentation
 - <https://www.rfc-editor.org/rfc/rfc8642.txt> for discussion of some of the issues operators need to be aware of

Receiving Prefixes: BGP Communities

- ❑ Don't accept community values that are not expected
 - Match expected values
 - Overwrite received community values with your own default value

```
ip community-list standard lp-250 permit 65534:250
!  
route-map ebgp-import permit 5  
  description Set high preference  
  match community lp-250  
  set local-preference 250  
  set community 65534:100  
!  
route-map ebgp-import permit 10  
  description Set our default community  
  set community 65534:100  
!
```

We only expect this community from our EBGp neighbour

Cisco IOS: this overwrites all incoming community values

Receiving Prefixes: BGP Communities

- ❑ Don't send community values that are not needed by peer
 - This avoids propagating your internal communities to other networks

```
route-map ebgp-export permit 5
  description Tell upstream to set local-pref 250
  set community 65534:250
!
```

← Cisco IOS: this overwrites all other community values

- ❑ Propagate all communities within the AS (by IBGP)
 - This may need changes to your equipment's default!

Receiving BGP attributes

- ❑ Care is needed when receiving prefixes, to be aware of some of the optional BGP attributes that may be attached
 - BGP communities are only intended for policy decisions within an AS or between two peering ASes
 - MEDs may have unexpected consequences for traffic flows on the peer's network
 - Bogon ASNs, like bogon address space, must never be used or announced to the global Internet

Prefixes into IBGP



Injecting prefixes into IBGP

- Use IBGP to carry customer prefixes
 - Don't use IGP
- Point static route to customer interface
- Use BGP network statement
- As long as static route exists (interface active), prefix will be in BGP

Router Configuration: network statement

□ Example:

```
interface loopback 0
  ip address 100.64.3.1 255.255.255.255
!
interface Serial 5/0
  ip unnumbered loopback 0
  ip verify unicast reverse-path
!
ip route 100.71.10.0 255.255.252.0 Serial 5/0
!
router bgp 100
  address-family ipv4
    network 100.71.10.0 mask 255.255.252.0
  !
```

Injecting prefixes into IBGP

- ❑ Interface flap will result in prefix withdraw and reannounce
 - use `"ip route . . . permanent"`
- ❑ Many network operators redistribute static routes into BGP rather than using the network statement
 - Only do this if you understand why

Router Configuration: redistribute static

□ Example:

```
ip route 100.71.10.0 255.255.252.0 Serial 5/0
!
router bgp 100
  address-family ipv4
    redistribute static route-map static-to-bgp
<snip>
!
route-map static-to-bgp permit 10
  match ip address prefix-list ISP-block
  set origin igp
  set community 100:1000
<snip>
!
ip prefix-list ISP-block permit 100.71.10.0/22 le 30
```


Injecting prefixes into IBGP

- ❑ Route-map **static-to-bgp** can be used for many things:
 - Setting communities and other attributes
 - Setting origin code to IGP, etc
- ❑ Be careful with prefix-lists and route-maps
 - Absence of either/both means all statically routed prefixes go into IBGP

Summary

□ Best Practices Covered:

- When to use BGP
- When to use ISIS/OSPF
- Aggregation
- Receiving Prefixes
- Prefixes into BGP

Interconnection Best Practices



PeeringDB and the Internet Routing
Registry



Interconnection Best Practices

- ❑ Types of Peering
- ❑ Using the PeeringDB and IXPDB
- ❑ Using the Internet Routing Registry

Types of Peering (1)

- Private Peering
 - Where two network operators agree to interconnect their networks, and exchange their respective routes, for the purpose of ensuring their customers can reach each other directly over the peering link
- Settlement Free Peering
 - No traffic charges
 - **The most common form of peering**
- Paid Peering
 - Where two operators agree to exchange traffic charges for a peering relationship

Types of Peering (2)

- Bi-lateral Peering
 - Very similar to Private Peering, but usually takes place at a public peering point (IXP)
- Multilateral Peering
 - Takes place at Internet Exchange Points, where operators all peer with each other via a Route Server
- Mandatory Multilateral Peering
 - Where operators are forced to peer with each other as condition of IXP membership
 - **Strongly discouraged: Has no record of success**

Types of Peering (3)

□ Open Peering

- Where a network operator publicly states that they will peer with all parties who approach them for peering
- Commonly found at IXPs where the network operator participates via the Route Server (RS)

□ Selective Peering

- Where a network operator's peering policy depends on the nature of the operator who requests peering with them
- At IXPs, the operator will not peer with RS but will only peer bilaterally

□ Restrictive Peering


- Where a network operator decides who its peering partners are, and is generally not approachable to considering peering opportunities

Types of Peering (4)

- ❑ The Peering Database documents network operator peering policies
 - <https://www.peeringdb.com>
- ❑ All operators with an AS are recommended to register in the PeeringDB
 - All operators who are considering peering or are peering must be in the PeeringDB to enhance their peering opportunities
- ❑ Participation in peering fora is encouraged too
 - Global Peering Forum (GPF) – (for North American peering)
 - Regional Peering Fora (European, Middle Eastern, Asian, Caribbean, Latin American)
 - Many countries now have their own Peering Fora

Types of Peering (5)

- ❑ The IXPDB documents IXPs and their participants around the world
 - <https://ixpdb.euro-ix.net/en/>
- ❑ All Internet Exchange Point operators should register their IXP in the database
 - IXPs using IXP Manager will have this happen as part of the IXP Manager set up
 - Provides the LAN IP addresses of each member to facilitate automation

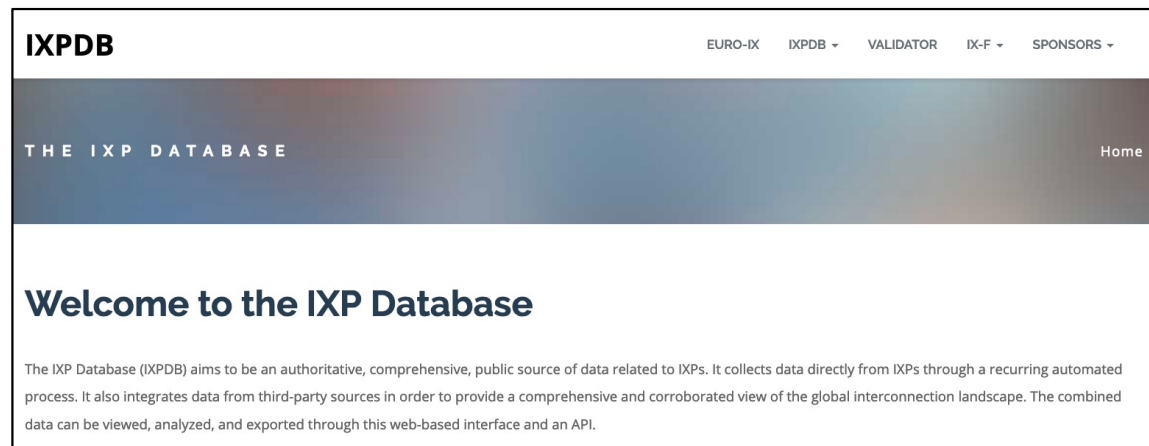

HKIX Gold Sponsor

Peers **296** Connections **381** Open Peers **186** Total Speed **14.7T** % with IPv6 **82**

Organization	Hong Kong Internet eXchange Limited
Also Known As	
Long Name	Hong Kong Internet Exchange
City	Hong Kong
Country	HK
Continental Region	Asia Pacific
Media Type	Ethernet
Service Level	Not Disclosed
Terms	Not Disclosed
Last Updated	2020-01-22T04:24:06Z
Notes	

Contact Information

Company Website	https://www.hkix.net/
Traffic Stats Website	https://www.hkix.net/hkix/stat/aggt/hkix-aggregate.html
Technical Email	noc@hkix.net
Technical Phone	+85239439900
Policy Email	info@hkix.net
Policy Phone	+85239438800
Sales Email	
Sales Phone	
Health Check	

Peers at this Exchange Point

Peer Name IPv4	ASN IPv6	Speed	Policy
2012 Limited 123.255.90.135	4658 2001:7fa:0:1::ca28:a087	10G	Selective
2012 Limited 123.255.90.122	4658 2001:7fa:0:1::ca28:a07a	1G	Selective
ACE CDN 123.255.91.67	139341 2001:7fa:0:1::ca28:a143	100G	Open
ACE CDN 123.255.91.79	139341 2001:7fa:0:1::ca28:a14f	100G	Open
ACME Universal 123.255.91.24	56190	1G	Open
ADVANCED HOSTERS 123.255.91.178	39572 2001:7fa:0:1::ca28:a1b2	100G	Selective
Advanced Information Co. 123.255.91.191	38047 2001:7fa:0:1::ca28:a1bf	10G	Open
Advanced Wireless Network Co. Ltd.(IIG) 123.255.92.80	45430 2001:7fa:0:1::ca28:a250	100G	Selective
AgotoZ HK 123.255.90.175	141167 2001:7fa:0:1::ca28:a0af	10G	Open
Akamai Prolexic DDoS Mitigation 123.255.91.26	32787 2001:7fa:0:1::ca28:a11a		Selective
Akamai Technologies 123.255.91.95	20940 2001:7fa:0:1::ca28:a15f	300G	Open
Akamai Technologies	20940	400G	Open

Amazon.com

Diamond Sponsor

Organization	Amazon.com, Inc.
Also Known As	Amazon Web Services
Long Name	
Company Website	http://www.amazon.com
ASN	16509
IRR as-set/route-set ?	AS16509:AS-AMAZON
Route Server URL	
Looking Glass URL	
Network Type	Enterprise
IPv4 Prefixes ?	12000
IPv6 Prefixes ?	5000
Traffic Levels	Not Disclosed
Traffic Ratios	Balanced
Geographic Scope	Global
Protocols Supported	<input checked="" type="checkbox"/> Unicast IPv4 <input type="checkbox"/> Multicast <input checked="" type="checkbox"/> IPv6 <input checked="" type="checkbox"/> Never via route servers ?
Last Updated	2023-09-01T08:36:56Z
Public Peering Info Updated	2023-08-25T01:57:49
Peering Facility Info Updated	2023-08-29T15:43:36
Contact Info Updated	2020-12-01T12:29:55Z
Notes ?	<p>AWS Peering - https://peering.aws/</p> <p>Peering requests:</p> <p>When submitting a peering request, please address the specific regional contact listed below only for the location of your request.</p> <p>(Example: <i>peering requests for London should use peering-</i></p>

Public Peering Exchange Points

Exchange <input type="checkbox"/> IPv4	ASN IPv6	Speed	RS Peer
1-IX EU 185.1.254.91	16509 2001:7f8:115:1::91	100G	<input type="radio"/>
AKL-IX (Auckland NZ) 43.243.21.112	16509 2001:7fa:11:6:0:407d:0:1	100G	<input type="radio"/>
AKL-IX (Auckland NZ) 43.243.21.113	16509 2001:7fa:11:6:0:407d:0:2	100G	<input type="radio"/>
AMS-IX 80.249.210.100	16509 2001:7f8:1::a501:6509:1	600G	<input type="radio"/>
AMS-IX 80.249.210.217	16509 2001:7f8:1::a501:6509:2	600G	<input type="radio"/>
AMS-IX Chicago 206.108.115.36	16509 2001:504:38:1:0:a501:6509:1	100G	<input type="radio"/>
AMS-IX Hong Kong 103.247.139.74	16509 2001:df0:296::a501:6509:2	10G	<input type="radio"/>
AMS-IX Hong Kong 103.247.139.10	16509 2001:df0:296::a501:6509:1	10G	<input type="radio"/>
AMS-IX Mumbai 223.31.200.29	16509 2001:e48:44:100b:0:a501:6509:2	10G	<input type="radio"/>
AMS-IX Mumbai 223.31.200.30	16509 2001:e48:44:100b:0:a501:6509:1	10G	<input type="radio"/>
AMS-IX Singapore 112.137.24.238	16509 2a00:8422:ae5::a501:6509:1	10G	<input type="radio"/>
AMS-IX Singapore	16509	10G	<input type="radio"/>

Interconnection Facilities

Arelion (Twelve99)

Organization	Arelion
Also Known As	f/k/a Telia Carrier
Long Name	
Company Website	https://www.arelion.com/
ASN	1299
IRR as-set/route-set ?	RIPE::AS1299:AS-TWELVE99
Route Server URL	
Looking Glass URL	https://lg.twelve99.net/
Network Type	NSP
IPv4 Prefixes ?	600000
IPv6 Prefixes ?	130000
Traffic Levels	100+Tbps
Traffic Ratios	Balanced
Geographic Scope	Global
Protocols Supported	<input checked="" type="checkbox"/> Unicast IPv4 <input type="checkbox"/> Multicast <input checked="" type="checkbox"/> IPv6 <input checked="" type="checkbox"/> Never via route servers ?
Last Updated	2023-08-25T12:04:42Z
Public Peering Info Updated	
Peering Facility Info Updated	2023-08-23T15:46:01
Contact Info Updated	2023-06-20T13:36:16
Notes ?	<p>AS1299 is matching RPKI validation state and reject invalid prefixes from peers and customers. Our looking-glass marks validation state for all prefixes. Please review your registered ROAs to reduce number of invalid prefixes.</p> <p>All trouble ticket requests or support related emails should be sent to support@arelion.com.</p>

Public Peering Exchange Points

Exchange <input type="checkbox"/> IPv4	ASN IPv6	Speed	RS Peer
---	-------------	-------	---------

No filter matches.
You may filter by **Exchange**, **ASN** or **Speed**.

Interconnection Facilities

Facility <input type="checkbox"/> ASN	Country City
123.NET - DC1 - 24700 Northwestern Hwy. 1299	United States of America Southfield
1530 SWIFT - NOCIX 1299	United States of America North Kansas City
1623 Farnam 1299	United States of America Omaha
365 Data Centers Buffalo (BU1) 1299	United States of America Buffalo
365 Data Centers Detroit (DT1) 1299	United States of America Southfield
365 Data Centers Nashville (NA1) 1299	United States of America Nashville
365 Data Centers Tampa (TA1) 1299	United States of America Tampa
3U Rechenzentrum Berlin 1299	Germany Berlin
910Telecom Denver 1299	United States of America Denver
Aitecom Mérida 1299	Mexico Mérida

Internet Routing Registry

- ❑ Many major transit providers and several content providers pay attention to what is contained in the Internet Routing Registry
 - There are many IRRs operating, the most commonly used being those hosted by the Regional Internet Registries, RADB, and some transit providers
- ❑ Best practice for any AS holder is to document their routing policy in the IRR
 - A route-object is the absolute minimum requirement

Internet Routing Registry

- ❑ IRR objects can be created via the database web-interfaces or submitted via email
- ❑ Policy language used to be known as RPSL
- ❑ Problems:
 - IRR contains a lot of outdated information
 - Network operators not following best practices
- ❑ Some network operators now using RPKI and ROAs to securely indicate the origin AS of their routes
 - Takes priority over IRR entries
 - RPKI and ROAs covered in other presentations

Internet Routing Registry

□ Which IRR database to use?

- Members of a Regional Internet Registry are recommended to use their RIR's Internet Routing Registry instance
 - Usually managed via the RIR's member portal giving easy access for creation and update of objects
 - Provided as part of the RIR's services to its members
- Operators who do not belong to any RIR generally use:
 - Their upstream transit provider's Routing Registry (if provided)
 - The RADB
 - <https://www.radb.net>
 - Note: Placing objects in the RADB requires an annual subscription fee

Route Object: Purpose

- ❑ Documents which Autonomous System number is originating the route listed
- ❑ Required by many major transit providers
 - They build their customer and peer filter based on the route-objects listed in the IRR
 - Referring to at least the 5 RIR routing registries and the RADB
 - Some operators run their own Routing Registry
 - ❑ May require their customers to place a Route Object there (if not using the 5 RIR or RADB versions of the IRR)

Route Object: Examples

```
route:      202.144.128.0/20
descr:      DRUKNET-BLOCK-A1
country:    BT
notify:     ioc@bt.bt
mnt-by:     MAINT-BT-DRUKNET
origin:     AS18024
last-modified: 2018-09-18T09:37:40Z
source:     APNIC
```

This declares that
AS18024 is the origin
of 202.144.128.0/20

```
route6:     2405:D000::/32
descr:      DRUKNET-IPV6-BLOCK
origin:     AS17660
notify:     netops@bt.bt
mnt-by:     MAINT-BT-DRUKNET
last-modified: 2010-07-21T03:46:02Z
source:     APNIC
```

This declares that
AS17660 is the origin
of 2405:D000::/32

AS Object: Purpose

- ❑ Documents peering policy with other Autonomous Systems
 - Lists network information
 - Lists contact information
 - Lists routes announced to neighbouring autonomous systems
 - Lists routes accepted from neighbouring autonomous systems
- ❑ Some operators pay close attention to what is contained in the AS Object
 - Some configure their border router BGP policy based on what is listed in the AS Object

AS Object: Example

```
aut-num:          AS17660
as-name:          DRUKNET-AS
descr:            DrukNet ISP, Bhutan Telecom, Thimphu
country:          BT
org:              ORG-BTL2-AP
import:           from AS6461      action pref=100;      accept ANY
export:           to AS6461        announce AS-DRUKNET-TRANSIT
import:           from AS2914      action pref=150;      accept ANY
export:           to AS2914        announce AS-DRUKNET-TRANSIT
<snip>
import:           from AS135666    action pref=250;    accept AS135666
export:           to AS135666      announce {0.0.0.0/0} AS-DRUKNET-TRANSIT
admin-c:          DNO1-AP
tech-c:           DNO1-AP
notify:           netops@bt.bt
mnt-irt:          IRT-BTTELECOM-BT
mnt-by:           APNIC-HM
mnt-lower:        MAINT-BT-DRUKNET
mnt-routes:       MAINT-BT-DRUKNET
last-modified:    2019-06-09T22:40:10Z
source:           APNIC
```

Examples of inbound and
outbound policies – RPSL

AS-Set: Purpose

- ❑ The AS-Set is used by network operators to group AS numbers they provide transit for in an easier to manage form
 - Convenient for more complicated policy declarations
 - Used mostly by network operators who build their EBGP filters from their IRR entries
 - Commonly used at Internet Exchange Points to handle large numbers of peers

AS-Set: Example

```
as-set:      AS-DRUKNET-TRANSIT
descr:      DrukNet transit networks
members:     AS17660
members:     AS38004
members:     AS132232
members:     AS134715
members:     AS135666
members:     AS137925
members:     AS59219
members:     AS18024
members:     AS18025
members:     AS137994
admin-c:     DNO1-AP
tech-c:      DNO1-AP
notify:      netops@bt.bt
mnt-by:      MAINT-BT-DRUKNET
last-modified: 2019-01-15T08:51:21Z
source:      APNIC
```

Lists all the autonomous
systems within the
AS-DRUKNET-TRANSIT group

Summary

□ PeeringDB

- An industry Best Practice so that:
 - Network operators can promote the interconnects they participate in and attract more peering partners

□ IXPDB

- An industry Best Practice so that:
 - Internet Exchange Points can show their participants and help make the interconnect more attractive for potential participants

□ IRR

- An industry Best Practice:
 - So that network operators can document which autonomous system is originating their prefixes
 - Used by network operators to filter prefixes received from their customers and peers

Route Origin Authorisation



Steps to securing the Routing System

Route Origin Authorisation

- ❑ Essential first step to secure the global routing system
- ❑ Covered in detail in separate presentation slide deck:
 - http://www.bgp4all.com.au/pfs/_media/workshops/02-rpki.pdf
- ❑ But there are some important best practices
 1. Signing ROAs
 2. Implementing ROV to drop “invalids”

Route Origin Authorisation (ROA)

- ❑ A digital object that contains a list of address prefixes and one AS number
- ❑ It is an authority created by a prefix holder to authorise an AS Number to originate one or more specific route advertisements
- ❑ Publish a ROA using your RIR member portal
 - Consult your RIR for how to use their member portal to publish your ROAs

Route Origin Authorisation

- A typical ROA would look like this:

Prefix	10.10.0.0/16
Max-Length	/18
Origin-AS	AS65534

- There can be more than one ROA per address block
 - Allows the operator to originate prefixes from more than one AS
 - Caters for changes in routing policy or prefix origin
- NB: Only create ROAs for the aggregate and the exact subnets expected in the routing table!! (See RFC9319)

Route Origin Validation

- Route Origin Validation means checking if the prefix received has a valid ROA
 - Valid ROA means that the prefix (and subnet) is being originated from the correct origin AS
 - See the “BGP Origin Validation” presentation for more in-depth content
- Implementing ROV means checking the validation database with what is learned from BGP peers:
 - Valid – allow; Invalid – drop; NotFound – allow (at lower preference?)
- **Problem**: how is this implemented in routers day?

Route Origin Validation

- ❑ The ideal would be to write directly to the active BGP table
- ❑ Some implementations use existing EBGP policy handling routines
 - ADJ-RIB-IN: table of all prefixes received prior to policy being applied
 - Route Refresh (RFC2918)
- ❑ Routers which maintain the ADJ-RIB-IN:
 - Apply the ROV policy to the stored received BGP table
 - Updates are applied “automatically” to the BGP table and therefore the FIB
 - No impact on any BGP peers (Route Refresh not needed)

Route Origin Validation

- ❑ Routers which do NOT maintain the ADJ-RIB-IN:
 - Apply the ROV policy by sending a Route Refresh to peers
 - When there are a large number of ROAs (November 2021 sees over 290k), and frequent changes or updates of ROAs:
 - ❑ Routers are sending frequent Route Refresh requests to peers (typically every few minutes)
 - ❑ Peers are being “bombed” by Route Refresh requests: significant resource burden when they send the full or a large portion of the BGP table
 - ❑ Severe control plane CPU impact on the peer router (effectively a Denial of Service on the peer router)
 - As more and more ROAs are created and altered globally, this problem becomes significantly more serious!

Route Refresh: Route Origin Validation

- ❑ JunOS implements ADJ-RIB-IN by default
 - ROA updates do not cause a problem when operating ROV
- ❑ Cisco does not implement ADJ-RIB-IN by default:
 - Applies to all of Cisco IOS/IOS-XE/IOS-XR...
 - **MUST turn on soft-reconfiguration if running ROV on the router**
 - Soft-reconfiguration is similar concept to ADJ-RIB-IN
 - ❑ Note that Route Refresh CLI seems to be no longer accessible

Enabling Cisco's Soft Reconfiguration

```
router bgp 64510
  address-family ipv4
    neighbor 100.64.1.1 remote-as 64511
    neighbor 100.64.1.1 route-map infilter in
    neighbor 100.64.1.1 soft-reconfiguration inbound
```

- When the policy needs to be changed:

```
clear ip bgp 100.64.1.1 soft in
```

- Note:

- When "soft-reconfiguration" is enabled, there is no access to the route-refresh capability CLI
- `clear ip bgp 100.64.1.1 in` also does a soft refresh

Using Cisco's Soft-Reconfiguration

- ❑ Strongly recommended when deploying Route Origin Validation
- ❑ Operators will also use soft-reconfiguration when troubleshooting EBGP peer problems
 - Soft reconfiguration enabled on an EBGP session means that the operator can see which prefixes were sent by a neighbour **before** any policy is applied
 - This helps save arguments between operators about whose BGP filters may have configuration errors!

Configuration Tips



Of passwords, tricks and templates

IBGP and IGP

Reminder!

- ❑ Make sure loopback is configured on router
 - IBGP between loopbacks, NOT physical interfaces
- ❑ Make sure IGP carries loopback IPv4 /32 and IPv6 /128 address
- ❑ Consider the DMZ nets:
 - Use unnumbered interfaces?
 - Use next-hop-self on IBGP neighbours
 - Or carry the DMZ IPv4 /30s and IPv6 /127s in the IBGP
 - Basically, keep the DMZ nets out of the IGP!

IBGP: Next-hop-self

- ❑ BGP speaker announces external network to IBGP peers using router's local address (loopback) as next-hop
- ❑ Used by many service providers on edge routers
 - Preferable to carrying DMZ point-to-point link addresses in the IGP
 - Reduces size of IGP to just core infrastructure
 - Alternative to using unnumbered interfaces
 - Helps scale network
 - Many service providers consider this "best practice"

Limiting AS Path Length

- ❑ Some BGP implementations have problems with long AS_PATHS
 - Memory corruption
 - Memory fragmentation
- ❑ Even using AS_PATH prepends, it is not normal to see more than 20 ASNs in a typical AS_PATH in the Internet Routing Table today
 - The Internet is around 5 ASes deep on average
 - Largest AS_PATH is usually 16-20 ASNs

```
neighbor x.x.x.x maxas-limit 20
```

Limiting AS Path Length

- Some announcements have ridiculous lengths of AS-paths
 - This example is an error in one IPv6 implementation

```
*> 3FFE:1600::/24      22 11537 145 12199 10318 10566 13193 1930 2200 3425 293 5609 5430
13285 6939 14277 1849 33 15589 25336 6830 8002 2042 7610 i
```

- This example shows 100 prepends (for no obvious reason)

```
*>i193.105.15.0      2516 3257 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404
50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404
50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404
50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404
50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404
50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404 50404
50404 i
```

- If your implementation supports it, consider limiting the maximum AS-path length you will accept

BGP Maximum Prefix Tracking

- ❑ Allow configuration of the maximum number of prefixes a BGP router will receive from a peer
 - ❑ Two level control:
 - Warning threshold: log warning message
 - Maximum: tear down the BGP peering, manual intervention required to restart
- ```
neighbor <x.x.x.x> maximum-prefix <max> [restart N] [<threshold>] [warning-only]
```
- ❑ *restart* is an optional keyword which will restart the BGP session N minutes after being torn down
  - ❑ *threshold* is an optional parameter between 1 to 100
    - Specify the percentage of <max> that will cause a warning message to be generated. Default is 75%.
  - ❑ *warning-only* is an optional keyword which allows log messages to be generated but peering session will not be torn down

# Private-AS – Application


- A network operator with end-sites multihomed on their backbone (RFC2270)

*or*

- A corporate network with several regions but connections to the Internet only in the core

*or*

- Within a BGP Confederation

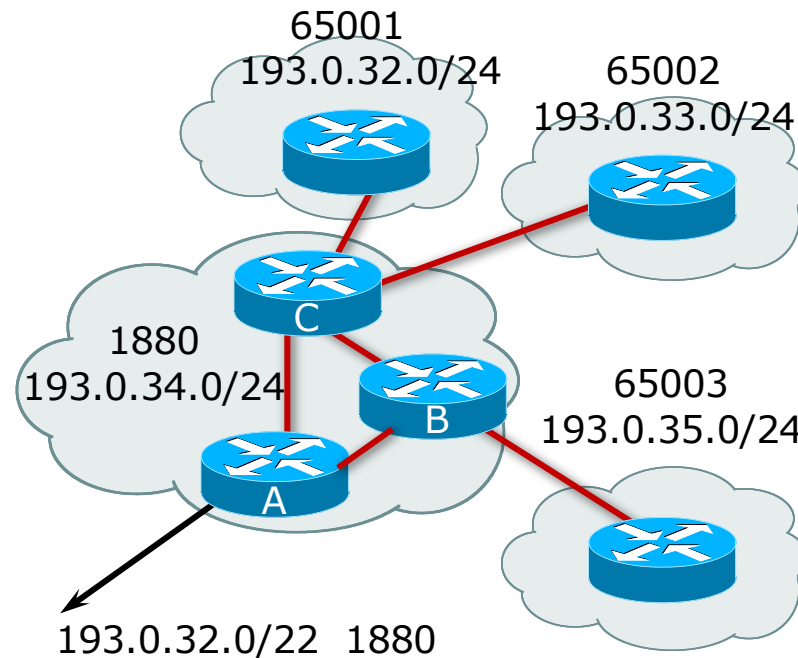

# Private-AS – Removal

---


- ❑ Private ASNs MUST be removed from all prefixes announced to the public Internet
  - Include configuration to remove private ASNs in the EBGp template
- ❑ As with RFC1918 address space, private ASNs are intended for internal use
  - They must not be leaked to or used on the public Internet
- ❑ Cisco IOS

```
neighbor x.x.x.x remove-private-AS
```



# BGP TTL “hack”

- Implement RFC5082 on BGP peerings
  - (Generalised TTL Security Mechanism)
  - Neighbour sets TTL to 255
  - Local router expects TTL of incoming BGP packets to be 254
  - No one apart from directly attached devices can send BGP packets which arrive with TTL of 254, so any possible attack by a remote miscreant is dropped due to TTL mismatch

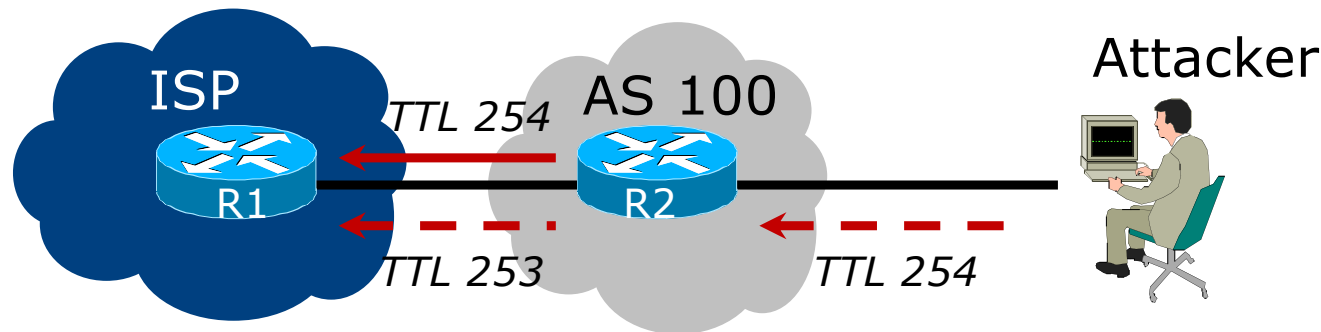

# BGP TTL “hack”

---

## □ TTL Hack:

- Both neighbours must agree to use the feature
- TTL check is much easier to perform than MD5
- (Called BTSH – BGP TTL Security Hack)

## □ Provides “security” for BGP sessions

- In addition to packet filters of course
- MD5 should still be used for messages which slip through the TTL hack
- See <https://www.nanog.org/meetings/nanog27/presentations/meyer.pdf> for more details

# BGP TTL “hack”

---

- Configuration example:

```
neighbor 100.121.0.2 ttl-security hops 1
```

- BGP neighbour status:

```
Router# sh ip bgp neigh 100.121.0.2
...
Mininum incoming TTL 254, Outgoing TTL 255
Local host: 100.121.0.1, Local port: 41103
Foreign host: 100.121.0.2, Foreign port: 179
```

- The neighbour must set the same configuration
  - If they don't, the BGP session will not come up

# Templates

---

- ❑ Good practice to configure templates for everything
  - Vendor defaults tend not to be optimal or even very useful for service providers
  - Service providers create their own defaults by using configuration templates
- ❑ EBGp and IBGP examples follow
  - Also see Team Cymru's BGP templates
    - ❑ <http://www.team-cymru.com/community-services>

# IBGP Template

## Example

---

- ❑ IBGP between loopbacks!
- ❑ Next-hop-self
  - Keep DMZ and external point-to-point out of IGP
- ❑ Always send communities in IBGP
  - Otherwise BGP policy accidents will happen
  - (Default on some vendor implementations, optional on others)
- ❑ Hardwire BGP to version 4
  - Yes, this is being paranoid!
  - Prevents accidental configuration of BGP version 3 which is still supported in some implementations

# IBGP Template

## Example continued

---

- ❑ Use passwords on IBGP session
  - Not being paranoid, **VERY** necessary
  - It's a secret shared between you and your peer
  - If arriving packets don't have the correct MD5 hash, they are ignored
  - Helps defeat miscreants who wish to attack BGP sessions
- ❑ Powerful preventative tool, especially when combined with filters and the TTL "hack"

# EBGP Template

## Example

---

- ❑ BGP damping
  - Do **NOT** use it unless you understand the impact
  - Do **NOT** use the vendor defaults without thinking
- ❑ Cisco's Soft Reconfiguration
  - Do **NOT** use unless troubleshooting or doing Route Origin Validation – it will consume considerable amounts of extra memory for BGP
- ❑ Remove private ASNs from announcements
  - Common omission today
- ❑ Use extensive filters, with “backup”
  - Use AS-path filters to backup prefix filters
  - Keep policy language for implementing policy, rather than basic filtering

# EBGP Template

## Example continued

---

- ❑ Use password agreed between you and peer on EBGP session
- ❑ Use maximum-prefix tracking
  - Router will warn you if there are sudden increases in BGP table size, bringing down EBGP if desired
- ❑ Limit maximum as-path length inbound
- ❑ Log changes of neighbour state
  - ...and monitor those logs!
- ❑ Make BGP admin distance higher than that of any IGP
  - Otherwise, prefixes heard from outside your network could override your IGP!!



# Mutually Agreed Norms for Routing Security

---

Industry Best Practices to ensure Security  
of the Routing System



MANRS

# Routing Security

---

## ❑ Implement the recommendations in

<https://www.manrs.org>

1. Prevent propagation of incorrect routing information
  - Filter BGP peers, in & out!
2. Prevent traffic with spoofed source addresses
  - BCP38 – Unicast Reverse Path Forwarding
3. Facilitate communication between network operators
  - NOC to NOC Communication
  - Up-to-date details in Route and AS Objects, and PeeringDB
4. Facilitate validation of routing information
  - Route Origin Authorisation using RPKI



MANRS

# MANRS 1)

---

- Filtering prefixes inbound and outbound
  - RFC8212 requires all EBGp implementations to reject prefixes received and announced in the absence of any policy
- Advice: ***Never*** set up an EBGp session without inbound and outbound prefix filters
  - If full table required, block at least the bogons (see earlier)

## MANRS 2)

---

- ❑ Implementing BCP 38
  - Unicast Reverse Path Forwarding
  - (Deny outbound traffic from customers which has spoofed source addresses)
  
- ❑ Advice: implement uRPF on ***all*** single-homed customer facing interfaces
  - Cheaper (CPU & RAM) than implementing packet filters

## MANRS 3)

---

- ❑ Facilitate NOC to NOC communication
  - Know the **direct** NOC contacts for your customer Network Operators, your peer Network Operators, and your upstream Network Operators
  - This is not calling their “customer support line”
  - Make sure NOC contact info is part of any service contract
  - Up to date info in Route and AS Objects
  - Up to date AS info in PeeringDB
- ❑ Advice: NOC contact info for all connected Autonomous Networks is known to your NOC

## MANRS 4)

---

- Facilitate validation of Routing Information
  - RPKI and Route Origin Authorisation (ROA)
  - All routes originated need to be signed to indicate that your AS is authorised to originate these routes
    - Helps secure the global routing system
- Advice: Sign ROAs for all originated routes using RPKI
  - And make sure all customer originated routes are also signed
  - Validate received routes from all peers
    - High priority for validated routes
    - Discard invalid routes
    - Low priority for unsigned routes

# MANRS summary

---

- ❑ If your organisation supports and implements all 4 techniques in your network
  - Then join MANRS
  - <https://www.manrs.org/join/>
    - ❑ MANRS for Operators
    - ❑ MANRS for IXPs
    - ❑ MANRS for CDN & Cloud Providers



MANRS

# Summary

---

- ❑ Use configuration templates
- ❑ Standardise the configuration
- ❑ Be aware of standard “tricks” to avoid compromise of the BGP session
- ❑ Anything to make your life easier, network less prone to errors, network more likely to scale
- ❑ Implement the four fundamentals of MANRS
- ❑ It's all about scaling – if your network won't scale, then it won't be successful



# BGP Best Current Practices



ISP Workshops